

YU-TCB25 AMERICAS

BEST VALUE IN THE WORLD OF CUTTING TOOLS



YG TAP

CHIP BREAKER

"The Trouble-Shooter"

TiN-COATED HSS-PM TAP

- Chip Breaker Technology
- 15° Helix Angle
- YG-1 Special Thread Structure



Chip Breaker

Special flute grinding process provides excellent performance with chip breaking to aid in chip evacuation

15° Helix Angle

Promotes efficient chip evacuation

YG-1 Special Thread Structure

Reduction in torque, wear, and the risk of overfeeding as compared to conventional taps

TiN Coating

Increased wear resistance by minimizing friction between the tap and the workpiece

HSS-PM Material

Powdered Metal Technology for a tough-chipping resistant cutting edge for long tool life and reliable thread finish


YG TAP CHIP BREAKER

“The Trouble-Shooter”

YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips, avoiding bird nesting.

Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Short Chip Obtained With YG Tap Chip Breaker!!



GUIDE TO ICONS

Working Material



Heat treated and heat-resistant steels
 $850\text{N/mm}^2 \leq R_m \leq 1,200\text{N/mm}^2$

Class of Thread



Surface Treatment



Titanium Nitride Coating

Tool Material



Thread Angle



Helix Angle



Chamfer Lead



Form C
(Chamfer Lead 2-3 Thread)



Form E
(Chamfer Lead 1.5-2 Thread)

Cutting Condition




CASE STUDY

TEST I YG TAP CHIP BREAKER (M8x1.25)

Cutting Condition


Material	DIN : 42CrMo4 / JIS : SCM440 / AISI : 4140		
Hardness	HRc30		
Machine	Machining Center (Horizontal)		
Cutting Fluid (Coolant)	Water Soluble (9%)		
Tool	YG-1	Competitor A	Competitor B
Dimension	M8 x 1.25		
Description	Spiral Flute		
Surface Treatment	TiN	TiCN	TiN
SFM	26		
Vc	26ft/min.		
Tapping Depth	.6299" (2xD)		
Tapping Holes	914+α	358	740

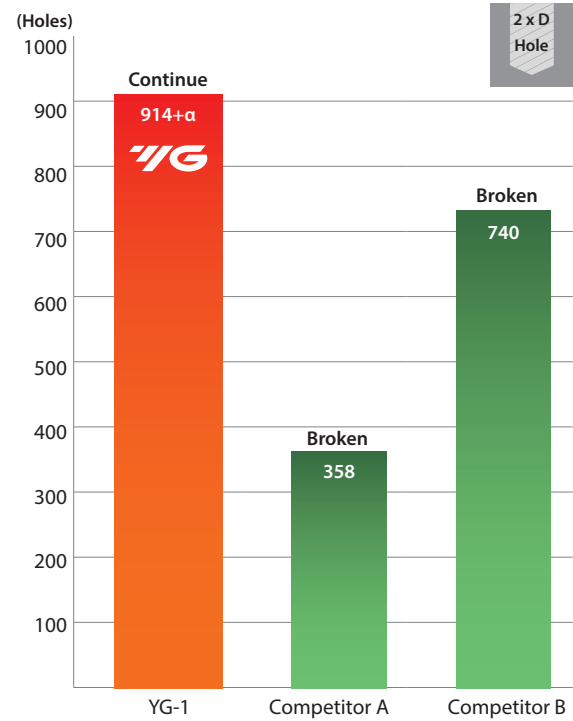

TEST II YG TAP CHIP BREAKER (M12x1.75)

Cutting Condition

Material	DIN : C45 / JIS : S45C / AISI : 1045		
Hardness	Below HRc20		
Machine	Machining Center (Horizontal)		
Cutting Fluid (Coolant)	Water Soluble (9%)		
Tool	YG-1	Competitor A	Competitor B
Dimension	M12 x 1.75		
Description	Spiral Flute		
Surface Treatment	TiN	TiCN	TiN
SFM	26		
Vc	26ft/min.		
Tapping Depth	.9449" (2xD)		
Tapping Holes	1000+α	450	381

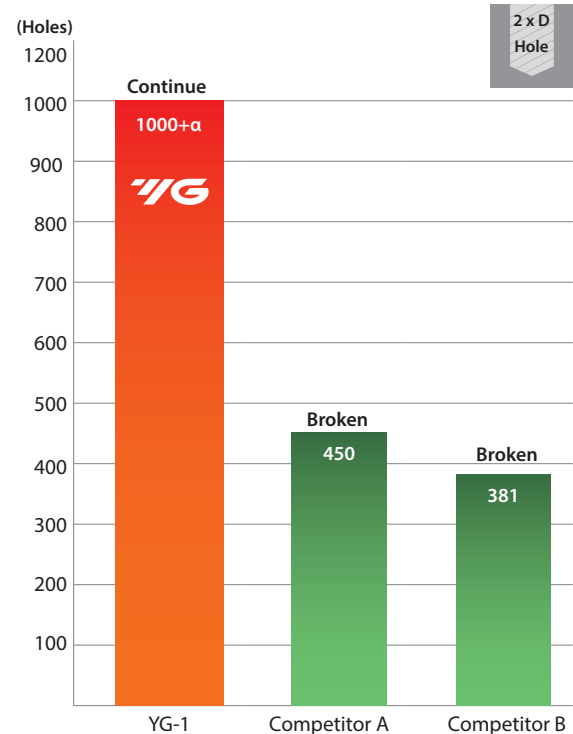

HSS-PM YG TAP CHIP BREAKER



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good


ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC	Examples					
P	1	Non-alloy steel	About 0.15% C	Annealed	125		S15C, C15, 1015	○ (23-39)	○ (23-39)	○ (23-45)		
	2		About 0.45% C	Annealed	190	13	S45C, C45, 1045	◎ (23-39)	◎ (23-39)	◎ (23-45)		
	3		About 0.45% C	Quenched & tempered	250	25		◎ (13-26)	◎ (13-26)	◎ (13-30)		
	4		About 0.75% C	Annealed	270	28	SK5, Ck75, 1080					
	5		About 0.75% C	Quenched & tempered	300	32						
	6	Low alloy steel		Annealed	180	10	SCM440, 42CrMo4, 410	○ (23-39)	○ (23-39)	○ (23-45)		
	7			Quenched & tempered	275	29		◎ (23-39)	◎ (23-39)	◎ (23-45)		
	8			Quenched & tempered	300	32		◎ (13-26)	◎ (13-26)	◎ (13-30)		
	9			Quenched & tempered	350	38		○ (13-26)	○ (13-26)	○ (13-30)		
	10	High alloyed steel, and tool steel		Annealed	200	15	SKD, D2	○ (20-30)	○ (20-30)	○ (20-35)		
	11			Quenched & Tempered	325	35	SKH, SUH, M42	○ (13-26)	○ (13-26)	○ (13-30)		
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	SUS 420, X40Cr13, 420					
	13		Martensitic	Quenched & Tempered	240	23						
	14			Austenitic	180	10	SUS 316, 316, X5CrNiMo 17 12 2					
K	15	Grey cast iron	Pearlitic / ferritic		180	10						
	16		Pearlitic (Martensitic)		260	26						
	17	Nodular cast iron	Ferritic		160	3	FCD, GGG, EN-GJS-500-7					
	18		Pearlitic		250	25						
	19	Malleable cast iron	Ferritic		130		FCMW, FCMP, GTS, GJMB350-10					
	20		Pearlitic		230	21						
N	21	Aluminum-wrought alloy	Not Curable		60		SAE 1000, AlMg 1, 3.3315					
	22		Curable		Hardened	100			SAE 7050, AlCuMg 1, 3.1325			
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		ADC12, G-AlSi12, 3.2581					
	24		≤ 12% Si, Curable		Hardened	90			C4BS, G-AlSi10Mg, 3.2381			
	25		> 12% Si, Not Curable		130							
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		CuZn36Pb 3, 2.0375					
	27		CuZn, CuSnZn (Brass)		90			CuZn 15, 2.0240				
	28		CuSn, lead-free copper and electrolytic copper		100				G-CuZn40Fe, 2.0590			
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					CFRP				
	30		Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	X12 NiCrSi 36-16, 1.4864					
	32			Cured	280	30						
	33		Ni or Co Based	Annealed	250	25	Inconel 718, NiCr20TiAl, 2.4631					
	34			Cured	350	38		NiCu30Al, 2.4375				
	35			Cast	320	34			G-X120Mn12, 1.3401			
	36	Titanium Alloys	Pure Titanium		400 Rm		TiAl6V4, 3.7165					
	37		Alpha + Beta Alloys		Hardened	1050 Rm						
H	38	Hardened steel		Hardened	550	55	SK3					
	39			Hardened	630	60						
	40	Chilled Cast Iron		Cast	400	42						
	41	Hardened Cast Iron		Hardened	550	55						

TIN-COATING, HSS-PM SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES





TTF21

DIN / ANSI

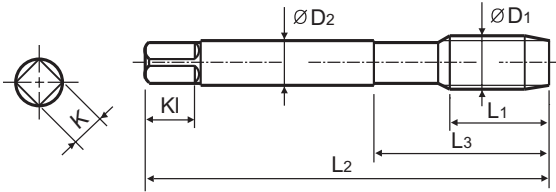

- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type
2.0×D



Unit : inch

SIZE ØD1	TPI	EDP No.	Limits	Thread Length L1	Overall Length L2	Neck Length L3	Shank Diameter ØD2	Square Size K	Square Length K1	No. of Flute Z	Tapping Drill Diameter(Ød1)	
											Inch	Metric
#8 - 32		TTF21282R	H2	.311	2.48	.827	.168	.131	.236	3	-	3.4
#8 - 32		TTF21283R	H3	.311	2.48	.827	.168	.131	.236	3	-	3.4
#8 - 36		TTF21302R	H2	.280	2.48	.827	.168	.131	.236	3	-	3.5
#10 - 24		TTF21323R	H3	.417	2.76	.976	.194	.152	.236	3	-	3.9
#10 - 32		TTF21342R	H2	.311	2.76	.976	.194	.152	.236	3	-	4.1
#10 - 32		TTF21343R	H3	.311	2.76	.976	.194	.152	.236	3	-	4.1
#12 - 24		TTF21363R	H3	.417	3.15	1.177	.220	.165	.268	3	-	4.5
#12 - 28		TTF21383R	H3	.358	3.15	1.177	.220	.165	.268	3	-	4.7
1/4 - 20		TTF21403R	H3	.500	3.15	1.177	.255	.191	.310	3	-	5.2
1/4 - 20		TTF21405R	H5	.500	3.15	1.177	.255	.191	.310	3	-	5.2
1/4 - 28		TTF21423R	H3	.358	3.15	1.177	.255	.191	.310	3	-	5.5
1/4 - 28		TTF21424R	H4	.358	3.15	1.177	.255	.191	.310	3	-	5.5
5/16 - 18		TTF21443R	H3	.555	3.54	1.378	.318	.238	.380	3	-	6.7
5/16 - 18		TTF21445R	H5	.555	3.54	1.378	.318	.238	.380	3	-	6.7
5/16 - 24		TTF21463R	H3	.417	3.54	1.378	.318	.238	.380	3	-	7.0
5/16 - 24		TTF21464R	H4	.417	3.54	1.378	.318	.238	.380	3	-	7.0
3/8 - 16		TTF21483R	H3	.626	3.94	1.535	.381	.286	.440	3	-	8.1
3/8 - 16		TTF21485R	H5	.626	3.94	1.535	.381	.286	.440	3	-	8.1
3/8 - 24		TTF21503R	H3	.417	3.94	1.535	.381	.286	.440	3	-	8.6
3/8 - 24		TTF21504R	H4	.417	3.94	1.535	.381	.286	.440	3	-	8.6
7/16 - 14		TTF21523R	H3	.713	3.94	1.713	.323	.242	.394	3	-	9.5
7/16 - 14		TTF21525R	H5	.713	3.94	1.713	.323	.242	.394	3	-	9.5
7/16 - 20		TTF21543R	H3	.500	3.94	1.713	.323	.242	.394	3	-	10.0
7/16 - 20		TTF21545R	H5	.500	3.94	1.713	.323	.242	.394	3	-	10.0

► NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎			○	◎	◎	○	○	○									
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

TIN-COATING, HSS-PM
SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES

TTF21




DIN / ANSI

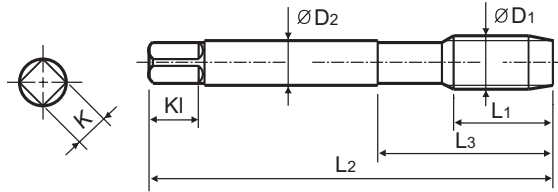

- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type

2.0×D



Unit : inch

SIZE ØD1	TPI	EDP No.	Limits	Thread Length L1	Overall Length L2	Neck Length L3	Shank Diameter ØD2	Square Size K	Square Length KI	No. of Flute Z	Tapping Drill Diameter(Ød1)	
											Inch	Metric
1/2 - 13		TTF21563R	H3	.768	4.33	1.933	.367	.275	.440	3	-	11.0
1/2 - 13		TTF21565R	H5	.768	4.33	1.933	.367	.275	.440	3	-	11.0
1/2 - 20		TTF21583R	H3	.500	3.94	1.933	.367	.275	.440	3	-	11.6
1/2 - 20		TTF21585R	H5	.500	3.94	1.933	.367	.275	.440	3	-	11.6
9/16 - 12		TTF21603R	H3	.835	4.33	1.972	.429	.322	.500	3	-	12.5
9/16 - 12		TTF21605R	H5	.835	4.33	1.972	.429	.322	.500	3	-	12.5
9/16 - 18		TTF21623R	H3	.555	3.94	1.972	.429	.322	.500	3	-	13.0
9/16 - 18		TTF21625R	H5	.555	3.94	1.972	.429	.322	.500	3	-	13.0
5/8 - 11		TTF21643R	H3	.909	4.33	2.126	.480	.360	.560	3	-	13.9
5/8 - 11		TTF21645R	H5	.909	4.33	2.126	.480	.360	.560	3	-	13.9
5/8 - 18		TTF21663R	H3	.555	3.94	2.126	.480	.360	.560	3	-	14.6
5/8 - 18		TTF21665R	H5	.555	3.94	2.126	.480	.360	.560	3	-	14.6
3/4 - 10		TTF21703R	H3	1.00	4.92	2.433	.590	.442	.673	4	-	16.9
3/4 - 10		TTF21705R	H5	1.00	4.92	2.433	.590	.442	.673	4	-	16.9
3/4 - 16		TTF21723R	H3	.626	4.33	2.433	.590	.442	.673	4	-	17.7
3/4 - 16		TTF21725R	H5	.626	4.33	2.433	.590	.442	.673	4	-	17.7
7/8 - 9		TTF21744R	H4	1.110	5.51	2.654	.697	.523	.736	4	-	19.8
7/8 - 9		TTF21746R	H6	1.110	5.51	2.654	.697	.523	.736	4	-	19.8
7/8 - 14		TTF21764R	H4	.713	4.92	2.654	.697	.523	.736	4	-	20.5
7/8 - 14		TTF21766R	H6	.713	4.92	2.654	.697	.523	.736	4	-	20.5
1" - 8		TTF21784R	H4	1.252	6.30	3.012	.800	.600	.800	4	-	22.7
1" - 8		TTF21786R	H6	1.252	6.30	3.012	.800	.600	.800	4	-	22.7
1" - 12		TTF21804R	H4	.835	5.51	3.012	.800	.600	.800	4	-	23.5
1" - 12		TTF21806R	H6	.835	5.51	3.012	.800	.600	.800	4	-	23.5

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎			○	◎	◎	○	○										
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				




TIN-COATING, HSS-PM SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES





TTF18

DIN / ANSI

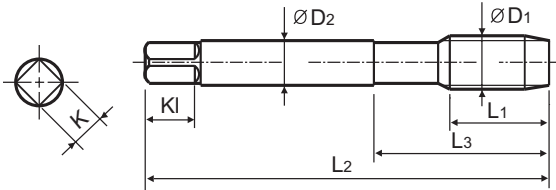

- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type
2.0×D



Unit : inch

SIZE	Pitch	EDP No.	Limits	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter(Ød1)	
ØD1	P			L1	L2	L3	ØD2	K	KI	Z	Inch	Metric
M4	x 0.7	TTF18244R	D4	.276	2.48	.823	.168	.191	.310	3	-	3.4
M5	x 0.8	TTF18284R	D4	.315	2.76	.988	.194	.191	.310	3	-	4.3
M6	x 1.0	TTF18315R	D5	.394	3.15	1.177	.255	.191	.310	3	-	5.1
M8	x 1.25	TTF18365R	D5	.512	3.54	1.378	.318	.238	.380	3	-	6.1
M8	x 1.0	TTF18375R	D5	.394	3.54	1.378	.318	.238	.380	3	-	6.9
M9	x 1.25	TTF18395R	D5	.512	3.54	1.378	.381	.286	.440	3	-	7.9
M9	x 1.0	TTF18405R	D5	.394	3.54	1.378	.381	.286	.440	3	-	8.1
M10	x 1.5	TTF18426R	D6	.591	3.94	1.535	.381	.286	.440	3	-	8.7
M10	x 1.25	TTF18435R	D5	.512	3.94	1.535	.381	.286	.440	3	-	8.9
M10	x 1.0	TTF18445R	D5	.394	3.54	1.378	.381	.286	.440	3	-	9.1
M12	x 1.75	TTF18506R	D6	.709	4.33	1.933	.367	.275	.440	3	-	10.5
M12	x 1.5	TTF18516R	D6	.591	3.94	1.933	.367	.275	.440	3	-	10.7
M12	x 1.25	TTF18525R	D5	.512	3.94	1.933	.367	.275	.440	3	-	10.9
M14	x 2.0	TTF18547R	D7	.787	4.33	1.972	.429	.322	.500	3	-	12.3
M14	x 1.5	TTF18556R	D6	.591	3.94	1.972	.429	.322	.500	3	-	12.7
M14	x 1.25	TTF18566R	D6	.512	3.94	1.972	.429	.322	.500	3	-	12.9
M16	x 2.0	TTF18607R	D7	.787	4.33	2.126	.480	.360	.560	3	-	14.3
M16	x 1.5	TTF18616R	D6	.591	3.94	2.126	.480	.360	.560	3	-	14.7
M18	x 2.5	TTF18657R	D7	.984	4.92	2.165	.542	.406	.610	4	-	15.8
M18	x 1.5	TTF18676R	D6	.591	4.33	2.165	.542	.406	.610	4	-	16.7
M20	x 2.5	TTF18708R	D8	.984	5.51	2.433	.652	.489	.673	4	-	17.8
M20	x 1.5	TTF18726R	D6	.591	4.92	2.433	.652	.489	.673	4	-	18.7
M22	x 2.5	TTF18748R	D8	.984	5.51	2.654	.697	.523	.736	4	-	19.8
M22	x 1.5	TTF18766R	D6	.591	4.92	2.654	.697	.523	.736	4	-	20.7
M24	x 3.0	TTF18788R	D8	1.181	6.30	2.693	.760	.570	.736	4	-	13.9
M24	x 1.5	TTF18806R	D6	.591	5.51	2.693	.760	.570	.736	4	27/32	-

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎			○	◎	◎	○	○	○									
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

TIN-COATING, HSS-PM
SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES

TTF22





DIN / ANSI

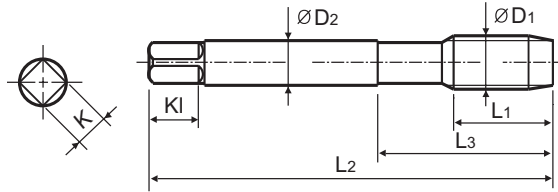

- ▶ YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- ▶ Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type

2.0×D



Unit : inch

SIZE ØD1	TPI	EDP No.	Limits	Thread Length L1	Overall Length L2	Neck Length L3	Shank Diameter ØD2	Square Size K	Square Length KI	No. of Flute Z	Tapping Drill Diameter(Ød1)	
											Inch	Metric
#8 - 32		TTF22282R	H2	.311	2.48	.827	.168	.131	.236	3	-	3.4
#8 - 32		TTF22283R	H3	.311	2.48	.827	.168	.131	.236	3	-	3.4
#8 - 36		TTF22302R	H2	.280	2.48	.827	.168	.131	.236	3	-	3.5
#10 - 24		TTF22323R	H3	.417	2.76	.976	.194	.152	.236	3	-	3.9
#10 - 32		TTF22342R	H2	.311	2.76	.976	.194	.152	.236	3	-	4.1
#10 - 32		TTF22343R	H3	.311	2.76	.976	.194	.152	.236	3	-	4.1
#12 - 24		TTF22363R	H3	.417	3.15	1.177	.220	.165	.268	3	-	4.5
#12 - 28		TTF22383R	H3	.358	3.15	1.177	.220	.165	.268	3	-	4.7
1/4 - 20		TTF22403R	H3	.500	3.15	1.177	.255	.191	.310	3	-	5.2
1/4 - 20		TTF22405R	H5	.500	3.15	1.177	.255	.191	.310	3	-	5.2
1/4 - 28		TTF22423R	H3	.358	3.15	1.177	.255	.191	.310	3	-	5.5
1/4 - 28		TTF22424R	H4	.358	3.15	1.177	.255	.191	.310	3	-	5.5
5/16 - 18		TTF22443R	H3	.555	3.54	1.378	.318	.238	.380	3	-	6.7
5/16 - 18		TTF22445R	H5	.555	3.54	1.378	.318	.238	.380	3	-	6.7
5/16 - 24		TTF22463R	H3	.417	3.54	1.378	.318	.238	.380	3	-	7.0
5/16 - 24		TTF22464R	H4	.417	3.54	1.378	.318	.238	.380	3	-	7.0
3/8 - 16		TTF22483R	H3	.626	3.94	1.535	.381	.286	.440	3	-	8.1
3/8 - 16		TTF22485R	H5	.626	3.94	1.535	.381	.286	.440	3	-	8.1
3/8 - 24		TTF22503R	H3	.417	3.94	1.535	.381	.286	.440	3	-	8.6
3/8 - 24		TTF22504R	H4	.417	3.94	1.535	.381	.286	.440	3	-	8.6
7/16 - 14		TTF22523R	H3	.713	3.94	1.713	.323	.242	.394	3	-	9.5
7/16 - 14		TTF22525R	H5	.713	3.94	1.713	.323	.242	.394	3	-	9.5
7/16 - 20		TTF22543R	H3	.500	3.94	1.713	.323	.242	.394	3	-	10.0
7/16 - 20		TTF22545R	H5	.500	3.94	1.713	.323	.242	.394	3	-	10.0

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	36	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎			○	◎	◎	○	○										
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

TIN-COATING, HSS-PM SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES




TTF22

DIN / ANSI

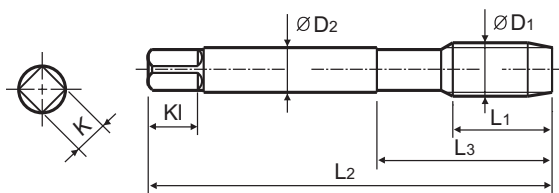

- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type
2.0×D

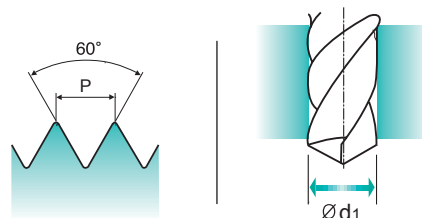

Unit : inch

SIZE ØD1	TPI	EDP No.	Limits	Thread Length L1	Overall Length L2	Neck Length L3	Shank Diameter ØD2	Square Size K	Square Length KI	No. of Flute Z	Tapping Drill Diameter(Ød1)	
1/2 - 13		TTF22563R	H3	.768	4.33	1.933	.367	.275	.440	3	-	11.0
1/2 - 13		TTF22565R	H5	.768	4.33	1.933	.367	.275	.440	3	-	11.0
1/2 - 20		TTF22583R	H3	.500	3.94	1.933	.367	.275	.440	3	-	11.6
1/2 - 20		TTF22585R	H5	.500	3.94	1.933	.367	.275	.440	3	-	11.6
9/16 - 12		TTF22603R	H3	.835	4.33	1.972	.429	.322	.500	3	-	12.5
9/16 - 12		TTF22605R	H5	.835	4.33	1.972	.429	.322	.500	3	-	12.5
9/16 - 18		TTF22623R	H3	.555	3.94	1.972	.429	.322	.500	3	-	13.0
9/16 - 18		TTF22625R	H5	.555	3.94	1.972	.429	.322	.500	3	-	13.0
5/8 - 11		TTF22643R	H3	.909	4.33	2.126	.480	.360	.560	3	-	13.9
5/8 - 11		TTF22645R	H5	.909	4.33	2.126	.480	.360	.560	3	-	13.9
5/8 - 18		TTF22663R	H3	.555	3.94	2.126	.480	.360	.560	3	-	14.6
5/8 - 18		TTF22665R	H5	.555	3.94	2.126	.480	.360	.560	3	-	14.6

◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎			○	◎	◎	○	○	○										
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
HRc											15	30	25	38	34			55	60	42	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	
Recommended																					


TIN-COATING, HSS-PM

SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES

TTF19





DIN / ANSI

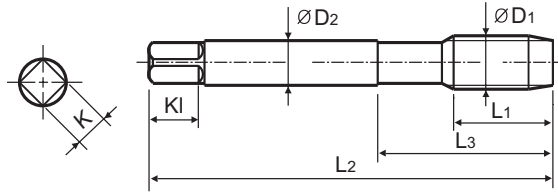

- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type

2.0×D



Unit : inch

SIZE	Pitch	EDP No.	Limits	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter(Ød1)	
ØD1	P			L1	L2	L3	ØD2	K	K1	Z	Inch	Metric
M4	x 0.7	TTF19244R	D4	.276	2.48	.823	.168	.191	.310	3	-	3.4
M5	x 0.8	TTF19284R	D4	.315	2.76	.988	.194	.191	.310	3	-	4.3
M6	x 1.0	TTF19315R	D5	.394	3.15	1.177	.255	.191	.310	3	-	5.1
M8	x 1.25	TTF19365R	D5	.512	3.54	1.378	.318	.238	.380	3	-	6.1
M9	x 1.25	TTF19395R	D5	.512	3.54	1.378	.381	.286	.440	3	-	7.9
M10	x 1.5	TTF19426R	D6	.591	3.94	1.535	.381	.286	.440	3	-	8.7
M10	x 1.25	TTF19435R	D5	.512	3.94	1.535	.381	.286	.440	3	-	8.9
M10	x 1.0	TTF19445R	D5	.394	3.54	1.378	.381	.286	.440	3	-	9.1
M12	x 1.75	TTF19506R	D6	.709	4.33	1.933	.367	.275	.440	3	-	10.5
M12	x 1.5	TTF19516R	D6	.591	3.94	1.933	.367	.275	.440	3	-	10.7
M12	x 1.25	TTF19525R	D5	.512	3.94	1.933	.367	.275	.440	3	-	10.9
M14	x 2.0	TTF19547R	D7	.787	4.33	1.972	.429	.322	.500	3	-	12.3
M14	x 1.5	TTF19556R	D6	.591	3.94	1.972	.429	.322	.500	3	-	12.7
M14	x 1.25	TTF19566R	D6	.512	3.94	1.972	.429	.322	.500	3	-	12.9
M16	x 2.0	TTF19607R	D7	.787	4.33	2.126	.480	.360	.560	3	-	14.3
M16	x 1.5	TTF19616R	D6	.591	3.94	2.126	.480	.360	.560	3	-	14.7
M18	x 2.5	TTF19657R	D7	.984	4.92	2.165	.542	.406	.610	4	-	15.8
M18	x 1.5	TTF19676R	D6	.591	4.33	2.165	.542	.406	.610	4	-	16.7

◎ : Excellent ○ : Good


ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎			○	◎	◎	○	○	○										
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

TIN-COATING, HSS-PM SPIRAL FLUTE TAPS with CHIP BREAKER


SERIES

TTF23

DIN / ANSI



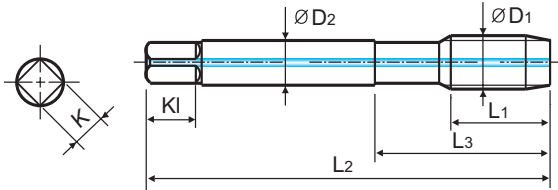


with Internal Coolant



- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type
2.0×D



Unit : inch

SIZE ØD1	TPI	EDP No.	Limits	Thread Length L1	Overall Length L2	Neck Length L3	Shank Diameter ØD2	Square Size K	Square Length K1	No. of Flute Z	Tapping Drill Diameter(Ød1)	
											Inch	Metric
1/4 - 20		TTF23403R	H3	.500	3.15	1.177	.255	.191	.310	3	-	5.2
1/4 - 20		TTF23405R	H5	.500	3.15	1.177	.255	.191	.310	3	-	5.2
1/4 - 28		TTF23423R	H3	.358	3.15	1.177	.255	.191	.310	3	-	5.5
1/4 - 28		TTF23424R	H4	.358	3.15	1.177	.255	.191	.310	3	-	5.5
5/16 - 18		TTF23443R	H3	.555	3.54	1.378	.318	.238	.380	3	-	6.7
5/16 - 18		TTF23445R	H5	.555	3.54	1.378	.318	.238	.380	3	-	6.7
5/16 - 24		TTF23463R	H3	.417	3.54	1.378	.318	.238	.380	3	-	7.0
5/16 - 24		TTF23464R	H4	.417	3.54	1.378	.318	.238	.380	3	-	7.0
3/8 - 16		TTF23483R	H3	.626	3.94	1.535	.381	.286	.440	3	-	8.1
3/8 - 16		TTF23485R	H5	.626	3.94	1.535	.381	.286	.440	3	-	8.1
3/8 - 24		TTF23503R	H3	.417	3.94	1.535	.381	.286	.440	3	-	8.6
3/8 - 24		TTF23504R	H4	.417	3.94	1.535	.381	.286	.440	3	-	8.6
7/16 - 14		TTF23523R	H3	.713	3.94	1.713	.323	.242	.394	3	-	9.5
7/16 - 14		TTF23525R	H5	.713	3.94	1.713	.323	.242	.394	3	-	9.5
7/16 - 20		TTF23543R	H3	.500	3.94	1.713	.323	.242	.394	3	-	10.0
7/16 - 20		TTF23545R	H5	.500	3.94	1.713	.323	.242	.394	3	-	10.0
1/2 - 13		TTF23563R	H3	.768	4.33	1.933	.367	.275	.440	3	-	11.0
1/2 - 13		TTF23565R	H5	.768	4.33	1.933	.367	.275	.440	3	-	11.0
1/2 - 20		TTF23583R	H3	.500	3.94	1.933	.367	.275	.440	3	-	11.6
1/2 - 20		TTF23585R	H5	.500	3.94	1.933	.367	.275	.440	3	-	11.6
9/16 - 12		TTF23603R	H3	.835	4.33	1.972	.429	.322	.500	3	-	12.5
9/16 - 12		TTF23605R	H5	.835	4.33	1.972	.429	.322	.500	3	-	12.5
9/16 - 18		TTF23623R	H3	.555	3.94	1.972	.429	.322	.500	3	-	13.0
9/16 - 18		TTF23625R	H5	.555	3.94	1.972	.429	.322	.500	3	-	13.0

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎			○	◎	◎	○	○	○									
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				


TIN-COATING, HSS-PM

SPIRAL FLUTE TAPS with CHIP BREAKER

SERIES

TTF23

DIN / ANSI

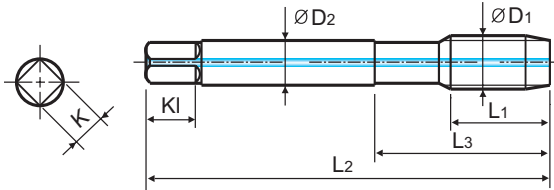




with Internal Coolant



- ▶ YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- ▶ Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type

2.0×D



Unit : inch

SIZE ØD1	TPI	EDP No.	Limits	Thread Length L1	Overall Length L2	Neck Length L3	Shank Diameter ØD2	Square Size K	Square Length KI	No. of Flute Z	Tapping Drill Diameter(Ød1)	
											Inch	Metric
5/8 - 11		TTF23643R	H3	.909	4.33	2.126	.480	.360	.560	3	-	13.9
5/8 - 11		TTF23645R	H5	.909	4.33	2.126	.480	.360	.560	3	-	13.9
5/8 - 18		TTF23663R	H3	.555	3.94	2.126	.480	.360	.560	3	-	14.6
5/8 - 18		TTF23665R	H5	.555	3.94	2.126	.480	.360	.560	3	-	14.6
3/4 - 10		TTF23703R	H3	1.00	4.92	2.433	.590	.442	.673	4	-	16.9
3/4 - 10		TTF23705R	H5	1.00	4.92	2.433	.590	.442	.673	4	-	16.9
3/4 - 16		TTF23723R	H3	.626	4.33	2.433	.590	.442	.673	4	-	17.7
3/4 - 16		TTF23725R	H5	.626	4.33	2.433	.590	.442	.673	4	-	17.7
7/8 - 9		TTF23744R	H4	1.110	5.51	2.654	.697	.523	.736	4	-	19.8
7/8 - 9		TTF23746R	H6	1.110	5.51	2.654	.697	.523	.736	4	-	19.8
7/8 - 14		TTF23764R	H4	.713	4.92	2.654	.697	.523	.736	4	-	20.5
7/8 - 14		TTF23766R	H6	.713	4.92	2.654	.697	.523	.736	4	-	20.5
1" - 8		TTF23784R	H4	1.252	6.30	3.012	.800	.600	.800	4	-	22.7
1" - 8		TTF23786R	H6	1.252	6.30	3.012	.800	.600	.800	4	-	22.7
1" - 12		TTF23804R	H4	.835	5.51	3.012	.800	.600	.800	4	-	23.5
1" - 12		TTF23806R	H6	.835	5.51	3.012	.800	.600	.800	4	-	23.5

◎ : Excellent ○ : Good


ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎			○	◎	◎	○	○	○										
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

TIN-COATING, HSS-PM SPIRAL FLUTE TAPS with CHIP BREAKER


SERIES

TTF20

DIN / ANSI



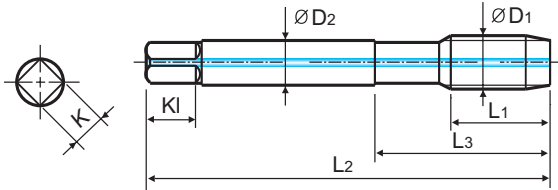


with Internal Coolant



- YG Tap Chip Breaker provides a solution to solve the productivity problem caused by long chips.
- Particularly suitable for machining non-alloy steel, low alloy steel, high alloy steel, and tool steel.

Hole type
2.0×D



Unit : inch

SIZE	Pitch	EDP No.	Limits	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter(Ød1)	
ØD1	P			L1	L2	L3	ØD2	K	K1	Z	Inch	Metric
M6	x 1.0	TTF20315R	D5	.394	3.15	1.177	.255	.191	.310	3	-	5.1
M8	x 1.25	TTF20365R	D5	.512	3.54	1.378	.318	.238	.380	3	-	6.1
M8	x 1.0	TTF20375R	D5	.394	3.54	1.378	.318	.238	.380	3	-	6.9
M9	x 1.25	TTF20395R	D5	.512	3.54	1.378	.381	.286	.440	3	-	7.9
M9	x 1.0	TTF20405R	D5	.394	3.54	1.378	.381	.286	.440	3	-	8.1
M10	x 1.5	TTF20426R	D6	.591	3.94	1.535	.381	.286	.440	3	-	8.7
M10	x 1.25	TTF20435R	D5	.512	3.94	1.535	.381	.286	.440	3	-	8.9
M10	x 1.0	TTF20445R	D5	.394	3.54	1.378	.381	.286	.440	3	-	9.1
M12	x 1.75	TTF20506R	D6	.709	4.33	1.933	.367	.275	.440	3	-	10.5
M12	x 1.5	TTF20516R	D6	.591	3.94	1.933	.367	.275	.440	3	-	10.7
M12	x 1.25	TTF20525R	D5	.512	3.94	1.933	.367	.275	.440	3	-	10.9
M14	x 2.0	TTF20547R	D7	.787	4.33	1.972	.429	.322	.500	3	-	12.3
M14	x 1.5	TTF20556R	D6	.591	3.94	1.972	.429	.322	.500	3	-	12.7
M14	x 1.25	TTF20566R	D6	.512	3.94	1.972	.429	.322	.500	3	-	12.9
M16	x 2.0	TTF20607R	D7	.787	4.33	2.126	.480	.360	.560	3	-	14.3
M16	x 1.5	TTF20616R	D6	.591	3.94	2.126	.480	.360	.560	3	-	14.7
M18	x 2.5	TTF20657R	D7	.984	4.92	2.165	.542	.406	.610	4	-	15.8
M18	x 1.5	TTF20676R	D6	.591	4.33	2.165	.542	.406	.610	4	-	16.7
M20	x 2.5	TTF20708R	D8	.984	5.51	2.433	.652	.489	.673	4	-	17.8
M20	x 1.5	TTF20726R	D6	.591	4.92	2.433	.652	.489	.673	4	-	18.7
M22	x 2.5	TTF20748R	D8	.984	5.51	2.654	.697	.523	.736	4	-	19.8
M22	x 1.5	TTF20766R	D6	.591	4.92	2.654	.697	.523	.736	4	-	20.7
M24	x 3.0	TTF20788R	D8	1.181	6.30	2.693	.760	.570	.736	4	-	13.9
M24	x 1.5	TTF20806R	D6	.591	5.51	2.693	.760	.570	.736	4	27/32	-

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎			○	◎	◎	○	○	○									
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

TROUBLE SHOOTING GUIDE

Specific Problem	Cause	Solution
Dimensional Accuracy		
Oversize Pitch Diameter	Incorrect Tap	1. Use proper limits of taps 2. Use longer chamfered taps
	Chip Packing	1. Use spiral point or spiral fluted taps 2. Reduce number of flutes to provide extra chip room 3. Use larger hole size 4. If tapping a hole, allow deeper hole where applicable or shorten the thread length of the parts 5. Use proper lubricant
	Galling	1. Apply proper surface treatment such as Hardslick or chrome 2. Use proper cutting lubricant 3. Reduce tapping speed 4. Use proper cutting angle in accordance with material being tapped 5. Use large hole size
	Operating Conditions	1. Apply proper tapping speed 2. Correct alignment of tap and drill hole 3. Free cutting either tap or workpiece 4. Use proper tapping speed to avoid torn or rough threads 5. Use lead screw tapper 6. Use proper tapping machine with suitable power 7. Avoid misalignment of the tap and drill hole from loose spindle or worn holder
	Tool Condition	1. Obtain proper indexing angle for the flutes at the cutting edge 2. Grind proper cutting angle and chamfer angle 3. Avoid too narrow a land width 4. Remove burrs from regrinding
Oversize Internal Diameter	Hole Size	1. Use minimum hole size 2. Avoid tapered hole 3. Use proper chamfered taps
	Galling	1. Galling solutions 1 through 4 above can be applied to this specific problem
Undersize Pitch Diameter	Incorrect Tap	1. Use oversize taps 2. Apply proper chamfer angle 3. Increase cutting angle
	Damaged Thread	1. Use proper reversing speed to avoid damaging tapped thread on the way out of the hole
	Left-over Chips	1. Increase cutting performance to avoid any left over chips in the hole 2. Remove left over chips from the hole for gage checking
Undersize Internal Diameter	Hole Size	1. Use maximum drill size
Breakage	Incorrect Tap Selection	1. Avoid chip packing in the flutes or on the bottom of the hole Use spiral pointed or spiral fluted taps or fluteless taps 2. Apply correct surface treatment such as Hardslick or bright
	Excessive Tapping Torque	1. Use larger drill size 2. Try to shorten thread length 3. Increase cutting angle 4. Apply a tap with more thread relief and reduced land width 5. Apply correct surface treatment such as Hardslick

TROUBLE SHOOTING GUIDE

Specific Problem	Cause	Solution
Dimensional Accuracy		
Breakage	Operating Conditions	1. Reduce tapping speed 2. Avoid misalignment between tap and the hole and tapered hole 3. Use floating type of tapping holder 4. Use tapping holder with torque adjustment 5. Avoid hitting bottom of the hole with tap
	Tool Condition	1. Do not grind the bottom of the flute 2. Avoid too narrow a land width 3. Remove all worn sections when regrinding the flutes 4. Regrind tool more frequently
Chipping	Incorrect Tap Selection	1. Reduce cutting angle 2. Use a different kind of high-speed steel tap 3. Reduce hardness of the tap 4. Increase chamfer length 5. Avoid chip packing in the flutes or in the bottom of the hole by using spiral fluted or spiral pointed taps
	Wear	1. Reduce tapping speed 2. Avoid misalignment between tap and hole 3. Avoid sudden return of reverse in blind hole tapping 4. Avoid galling 5. Use larger hole size
Wearx	Incorrect Tap Selection	1. Apply specially designed tap for tapping heat treated material 2. Change to a type of high-speed steel tap that contains vanadium 3. Apply special surface treatment such as TiCN, TiAlN or Hardslick 4. Increase chamfer length
	Operating Conditions	1. Reduce tapping speed 2. Apply proper cutting lubricants 3. Avoid work hardened hole 4. Use larger hole size
	Tool Condition	1. Grind proper cutting angle 2. Avoid hardness reduction from grinding process
Torn or Rough Thread	Chamfer Too Short	1. Increase chamfer length
	Wrong Cutting Angle	1. Apply proper cutting angle
	Galling	1. Use thread relieved taps 2. Reduce land width 3. Apply surface treatment such as Hardslick or chrome 4. Use proper cutting lubricant 5. Reduce tapping speed 6. Use larger hole size 7. Obtain proper alignment between tap and work
	Chip Packing	1. Use spiral pointed or spiral fluted taps 2. Use larger drill size
Chattering on Tapped Thread	Tool Free Cutting	1. Reduce cutting angle 2. Reduce amount of thread relief
	Tool Condition	1. Avoid too narrow land width 2. Do not grind the bottom of the flute

MEMO



MEMO



HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1981, YG-1 has been committed to quality, innovation and the unique customer experience.

Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

 BELGIUM	 FINLAND	 ITALY	 PORTUGAL	 SLOVENIA	 THE NETHERLANDS
 CROATIA	 FRANCE	 LITHUANIA	 ROMANIA	 SPAIN	 TÜRKIYE
 CZECH REPUBLIC	 GERMANY	 NORWAY	 SWEDEN	 UNITED KINGDOM	 DENMARK
 HUNGARY	 POLAND	 SERBIA	 SWITZERLAND	 AUSTRIA	 GREECE
 ALBANIA	 BOSNIA AND HERZEGOVINA	 UKRAINE	 UZBEKISTAN	 BULGARIA	
 ESTONIA					

ASIA PACIFIC

 AUSTRALIA	 INDONESIA	 MALAYSIA	 SOUTH KOREA	 VIETNAM
 CHINA	 ISRAEL	 PAKISTAN	 TAIWAN	
 HONG KONG	 JAPAN	 PHILIPPINES	 THAILAND	
 INDIA	 SAUDI ARABIA	 SINGAPORE	 UNITED ARAB EMIRATES	

AMERICAS

 BRAZIL	 CANADA	 COLOMBIA	 MEXICO	 UNITED STATES
--	--	--	--	---

AFRICA

 EGYPT	 SOUTH AFRICA
---	--

YG-1 CO., LTD.

* For the more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

E-mail: yg1@yg1.solutions www.yg1.solutions

YG-1 CO., LTD.

YG-1 USA

730 Corporate Woods Parkway,
Vernon Hills, IL 60061 U.S.A.

Phone: 800-765-8665

Technical Assistance: 888-868-5988

www.yg1usa.com

YG-1 CANADA INC.

3375 North Service Road, Unit A8,
Burlington, Ontario, CANADA L7N 3G2

Phone: +1 905-335-2500

FAX: +1 905-335-4003

Customer Service: orders@yg1.ca

www.yg1.ca

YG-1 TOOLS MEXICO

Parque Industrial Advance Aeropuerto Modulo 4 Edif A,
Col. Navajas, El Marques,
Querétaro, México CP 76260

Phone: +52 442 348 12 70

E-mail: ventas@yg1mexico.com

www.yg1mexico.com

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

www.yg1.solutions

E-mail: yg1@yg1.solutions



Search 'YG-1' on social media outlets



YG1YUTCB2508001