


NO.	DATE	REVISION	DRAWN


# APPROVAL

DATE

SIGNATURE

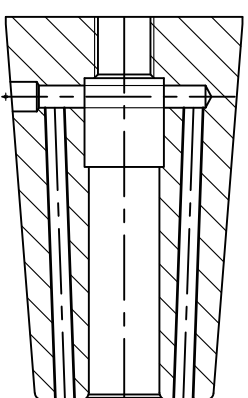

- NOTE
- 1.ROUND R=1.0
  - 2.BREAK SHARP CORNERS 0.5x45°
  - 3.ANGLES ±0°15'
  - 4.SFH-C ADJUST BOLT(T) : M8x1.0x15L
  - 5.NYLOC BOLT : M4x0.7x4L(4EA)
  - 6.BALANCE : G2.5 / 25,000rpm

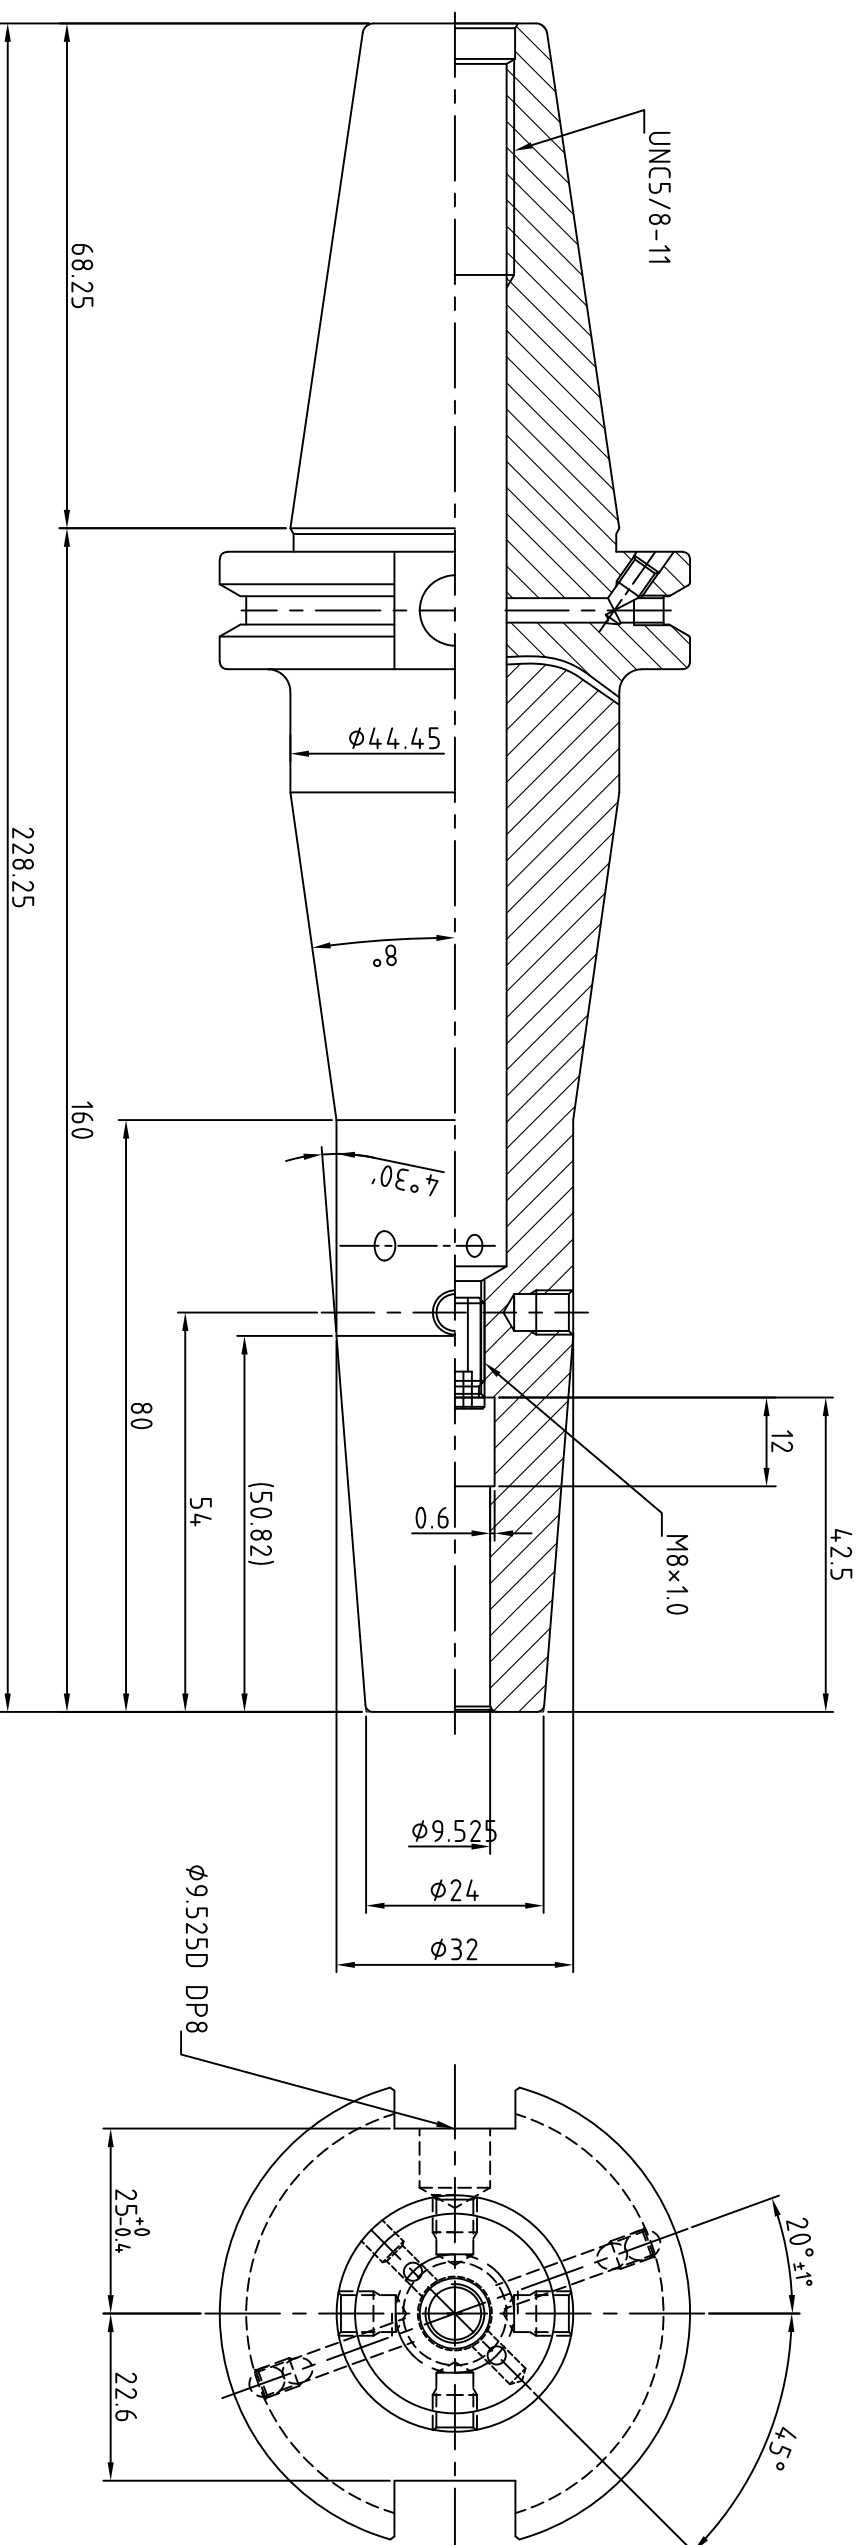

MARKING	
CAT40AD/B-SFH3/8CTW-6.30 VK030JTW 월/년 0일 G2.5/25,000	

MATERIAL	REV No.	00	DATE	2021.03.19	
MAT. SIZE	SURFACE TREATMENT				
HARDNESS	H <sub>R</sub> C	KIND	ASME B5.50 : 2009		
DESCRIPTION	SHRINK FIT HOLDER				
ORDER MAKER	SAB	OEM CODE	VK030JTW		
SPEC.	CAT40AD/B-SFH9.525(3/8")CTW-160(6.30")				
	TYPE	Machining			
표	기	호	R <sub>max</sub>	R <sub>a</sub>	R <sub>z</sub>
~	▽	▽	-	-	-
▽	▽ <sup>W</sup>	▽ <sup>25</sup>	100S	25a	100Z
▽	▽ <sup>X</sup>	▽ <sup>63</sup>	25S	63a	25Z
▽	▽ <sup>Y</sup>	▽ <sup>19</sup>	6.3S	1.6a	6.3Z
▽	▽ <sup>Z</sup>	▽ <sup>02</sup>	0.8S	0.2a	0.8Z
기	본	차	SCALE	1 : 1	mm
구	분	내	외	전	장
1-50	50-100	+0.1	-0.1	±0.1	
50-100	100-250	+0.15	-0.15	±0.15	
100-250	250-500	+0.25	-0.25	±0.25	
250-500		+0.35	-0.35	±0.35	
DRAWN	CHECKED	CHECKED	CHECKED	APPROVED	
Y.H.J					
신세기산업주식회사					