


NO.	DATE	REVISION	DRAWN



APPROVAL

DATE

SIGNATURE

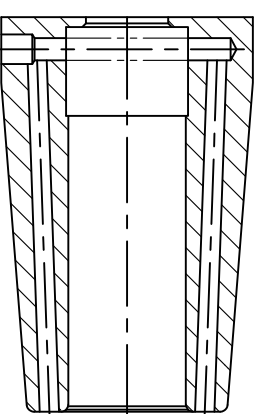

- NOTE
1. ROUND R=1.0
 2. BREAK SHARP CORNERS 0.5x45°
 3. ANGLES ±0°15'
 4. SFH-C ADJUST BOLT(T) : M12x1.0x15L
 5. NYLOC BOLT : M4x0.7x4L(4EA)
 6. BALANCE : G2.5 / 25,000rpm

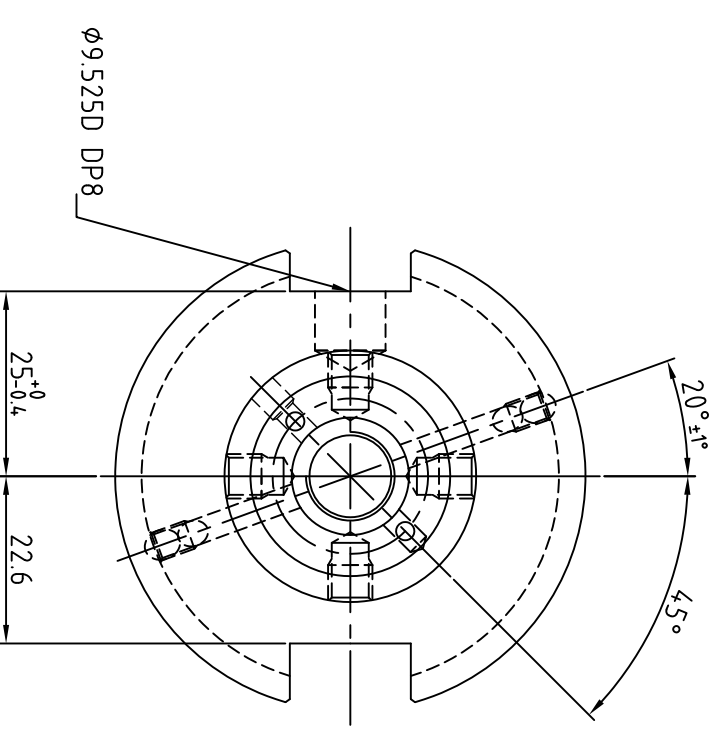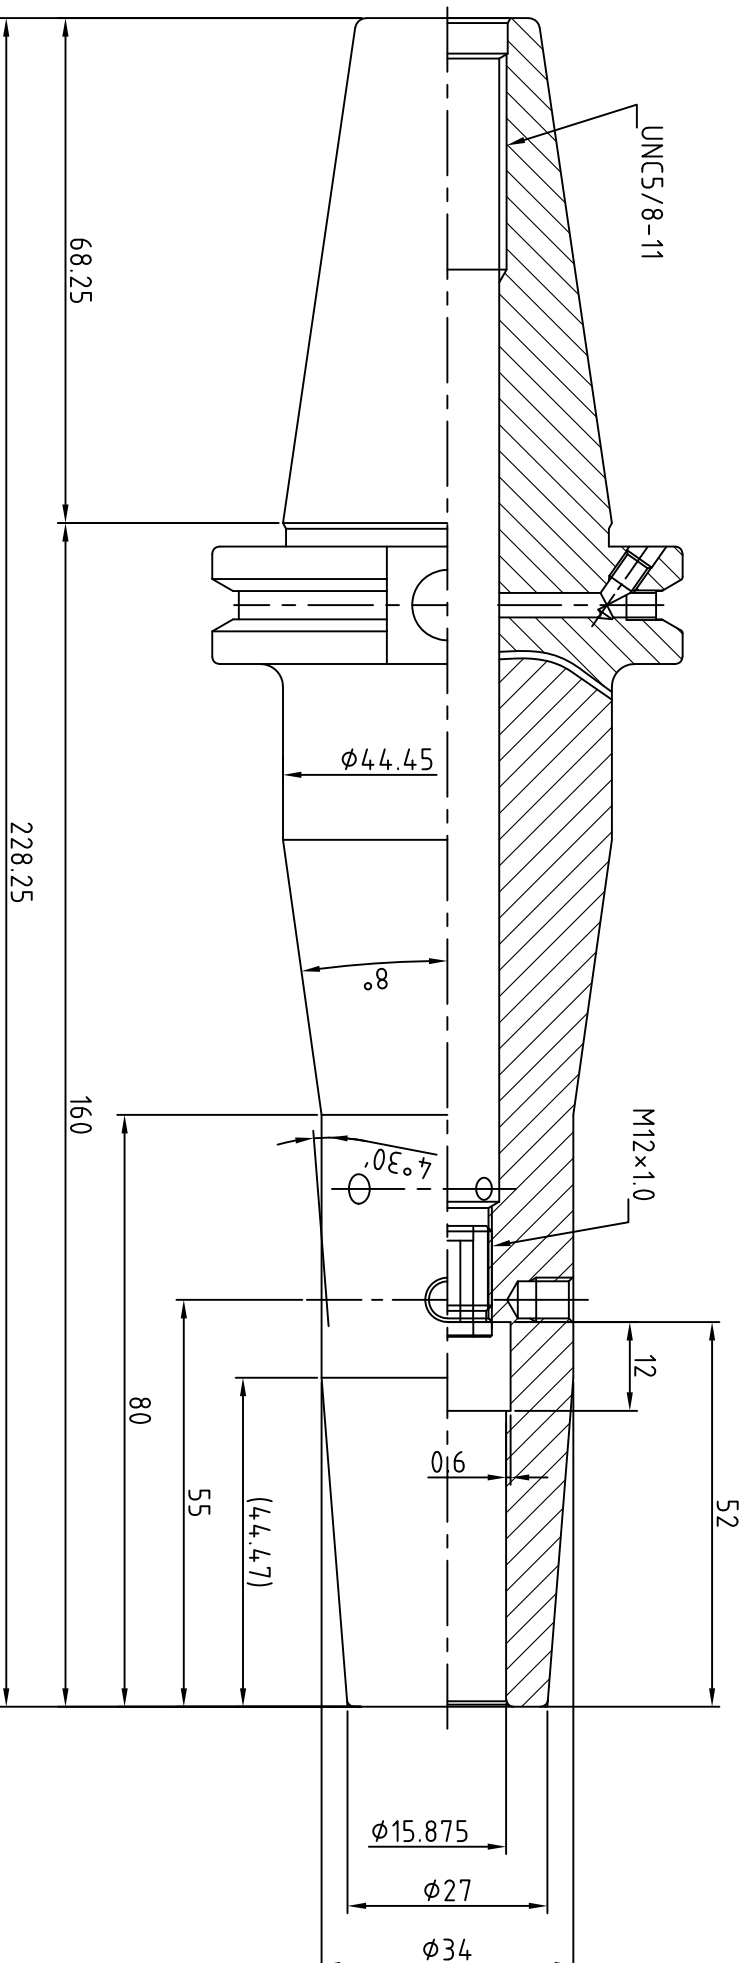

MARKING	
CAT40AD/B-SFH5/8CTW-6.30 VK038JTW 월/년 0일 G2.5/25,000	

MATERIAL	REV No.	00	DATE	2021.03.19	표	기 호	Rmax	Ra	Rz	기 본 공 차 (mm)	구 분	1-50	50-100	100-250	250-500	DRAWN	CHECKED	CHECKED	APPROVED
MAT. SIZE	SURFACE TREATMENT				~	φ/φ	-	-	-	내경	+0.1	+0.15	+0.25	+0.35	Y.H.J				
HARDNESS	KIND	ASME B5.50 : 2009			▽	▽ ^W	100S	25a	100Z	외경	-0.1	-0.15	-0.25	-0.35					
DESCRIPTION	SHRINK FIT HOLDER				▽▽	▽ ^X	25S	63a	25Z	전장	±0.1	±0.15	±0.25	±0.35					
ORDER MAKER	SAB	OEM CODE	VK038JTW		▽▽▽	▽ ^Y	6.3S	1.6a	6.3Z	SCALE	1 : 1								
SPEC:	CAT40AD/B-SFH15.875(5/8")CTW-160(6.30")				▽▽▽▽	▽ ^Z	0.8S	0.2a	0.8Z	Dim.	mm								
					도	▽▽▽▽	0.8S	0.2a	0.8Z										