


NO.	DATE	REVISION	DRAWN


APPROVAL

DATE

SIGNATURE

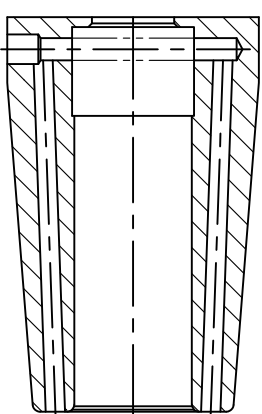

- NOTE
- 1.ROUND R=1.0
 - 2.BREAK SHARP CORNERS 0.5x45°
 - 3.ANGLES ±0°15'
 - 4.SFH-C ADJUST BOLT(T) : M12x1.0x15L
 - 5.NYLOC BOLT : M4x0.7x4L(4EA)
 - 6.BALANCE : G2.5 / 25,000rpm

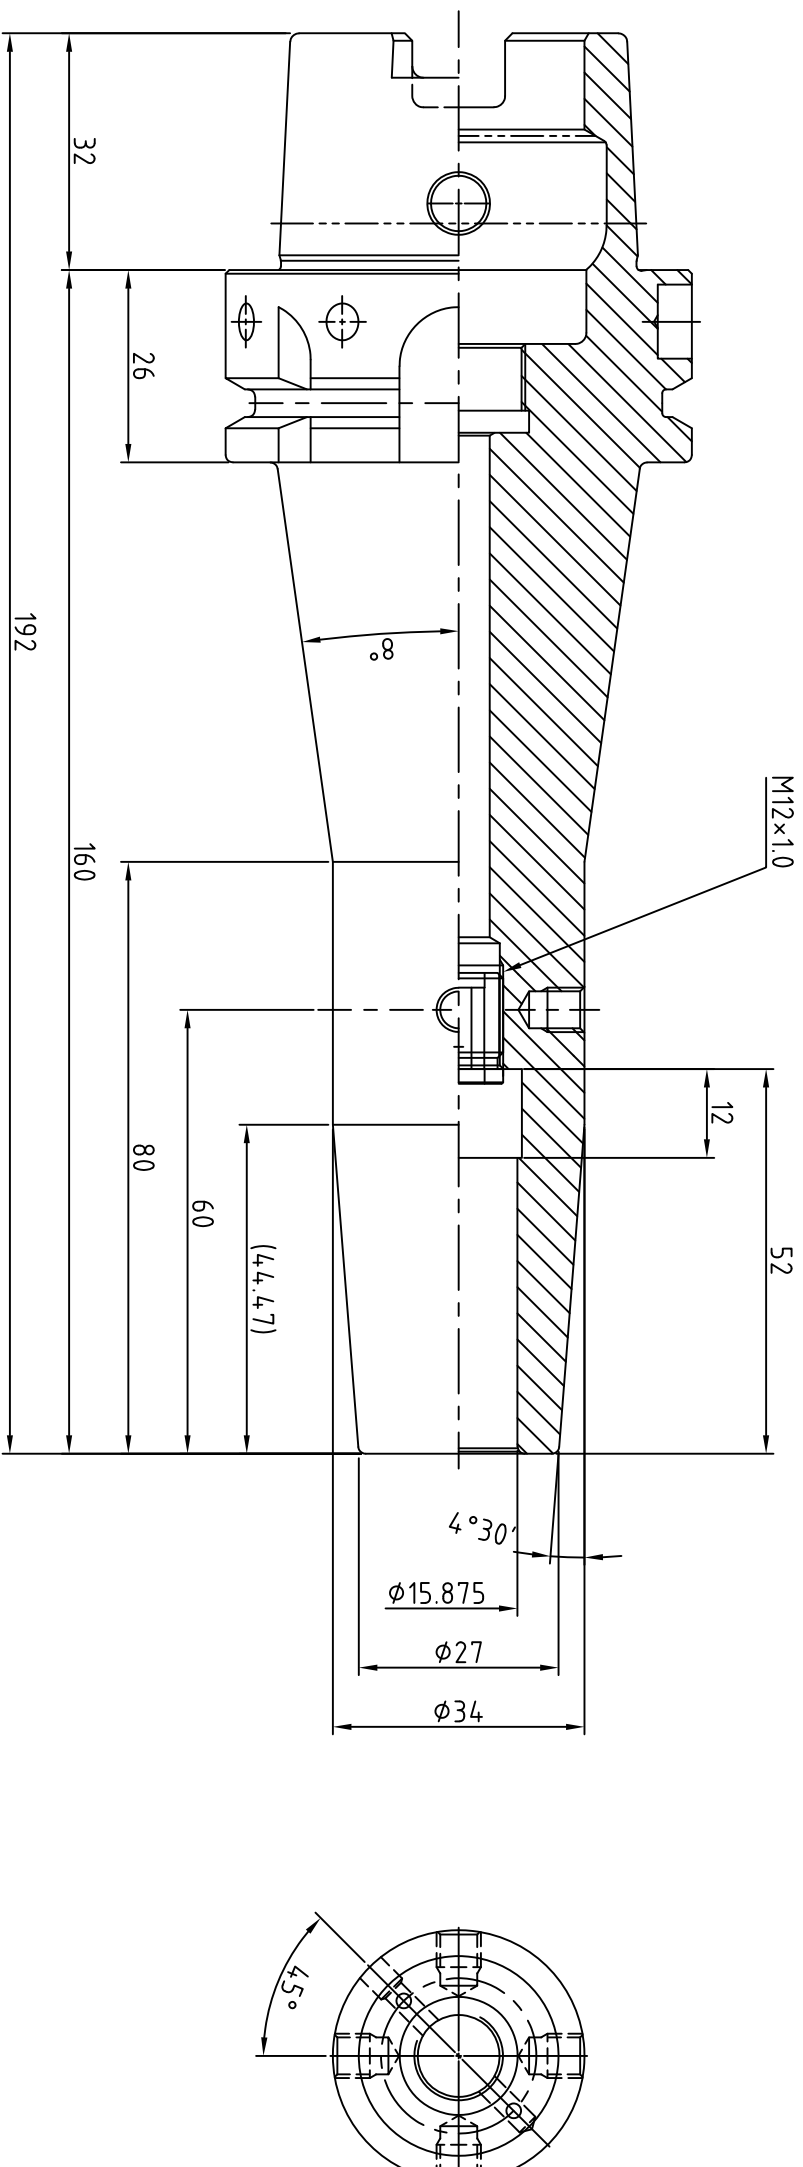

MARKING	
	HSK63A-SFH5/8CTW-6.30
	VQ038JTW 월/년0일 G2.5/25,000

MATERIAL	REV No.	00	DATE	2021.03.22	표	기	호	Rmax	Ra	Rz	기	본	구	1-50	50-100	100-250	250-500	DRAWN	CHECKED	CHECKED	APPROVED
MAT. SIZE	SURFACE TREATMENT				~	▽	▽	-	-	-	차	내	+0.1	+0.15	+0.25	+0.35		Y.H.J			
HARDNESS	KIND	ASME B5.50 : 2009			▽	▽	100S	25a	100Z	(mm)	외	+0	+0.15	+0.25	+0.35						
DESCRIPTION	SHRINK FIT HOLDER				▽	▽	25S	63a	25Z	전	장	±0.1	±0.15	±0.25	±0.35						
ORDER MAKER	SAB	OEM CODE	VQ038JTW	TYPE	도	조	면	0.85	0.2a	0.8Z	SCALE	1 : 1									
SPEC.	HSK63A-SFH15.875(5/8")CTW-160(6.30")			Machining	도	조	면	0.85	0.2a	0.8Z	Dim.	mm									

신세기산업주식회사
SSK