


NO.	DATE	REVISION	DRAWN



# APPROVAL

DATE

SIGNATURE



- NOTE
- 1.ROUND R=1.0
  - 2.BREAK SHARP CORNERS 0.5x45°
  - 3.ANGLES ±0°15'
  - 4.SFH-C ADJUST BOLT (T) : M6x1.0x15L
  - 5.NYLOC BOLT : M4x0.7x4L(4EA)
  - 6.BALANCE : G2.5 / 25,000rpm

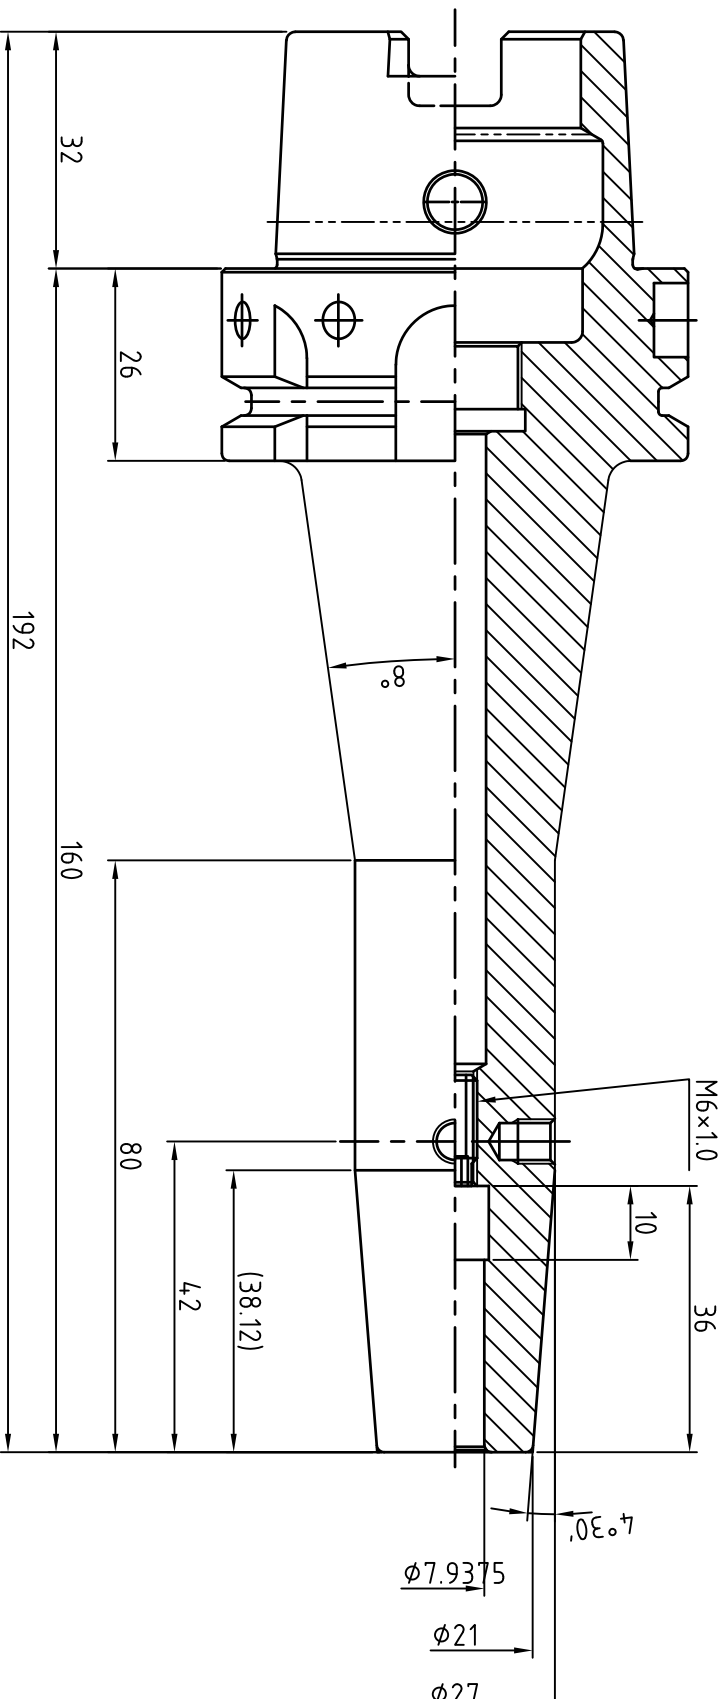

## MARKING

SSK HSK63A-SFH5/16CTW-6.30  
 VQ060JTW 월/년0일 G2.5/25,000

MATERIAL	REV No.	00	DATE	2021.03.22
MAT. SIZE	SURFACE TREATMENT			
HARDNESS HRC	KIND	ASME B5.50 : 2009		
DESCRIPTION	SHRINK FIT HOLDER			
ORDER MAKER	SAB	OEM CODE	VQ060JTW	
SPEC.	HSK63A-SFH7.9375(5/16")CTW-160(6.30")	TYPE	Machining	

표면	기호	Rmax	Ra	Rz
~	√	-	-	-
▽	√ <sup>W</sup>	100S	25a	100Z
▽	√ <sup>X</sup>	25S	63a	25Z
▽	√ <sup>6.3</sup>	6.3S	1.6a	6.3Z
▽	√ <sup>1.9</sup>	0.8S	0.2a	0.8Z

기분	1-50	50-100	100-250	250-500
내경	+0.1 -0	+0.15 -0	+0.25 -0	+0.35 -0
외경	+0 -0.1	+0 -0.15	+0 -0.25	+0 -0.35
전장	±0.1	±0.15	±0.25	±0.35

SCALE	1 : 1
Dim.	mm

DRAWN	CHECKED	CHECKED	CHECKED	APPROVED
Y.H.J				

**SSK**  
 신세기산업주식회사