

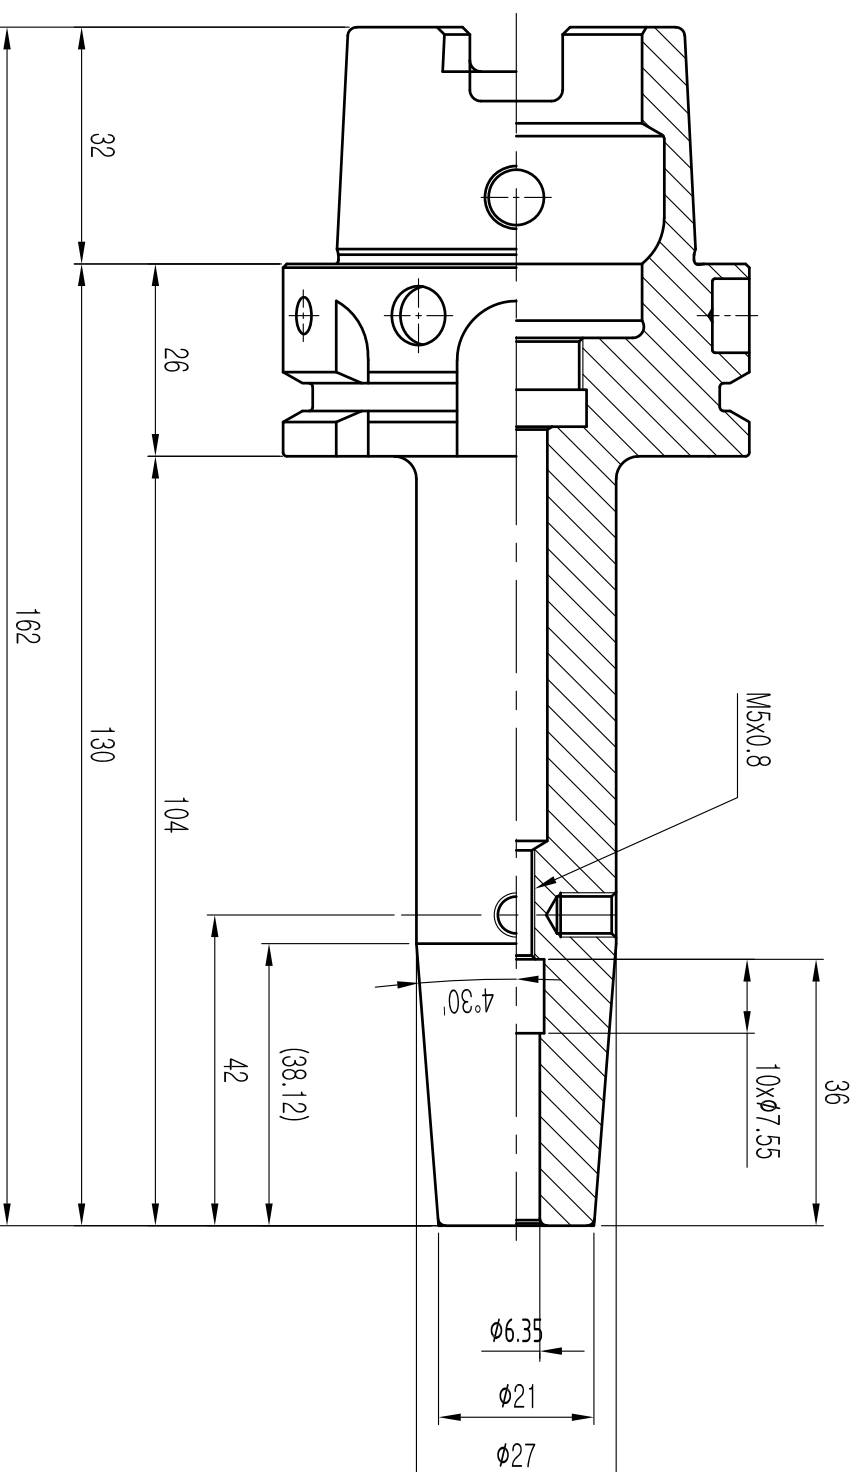


| | |
|-----------------|--|
| APPROVAL | |
| DATE | |
| SIGNATURE | |

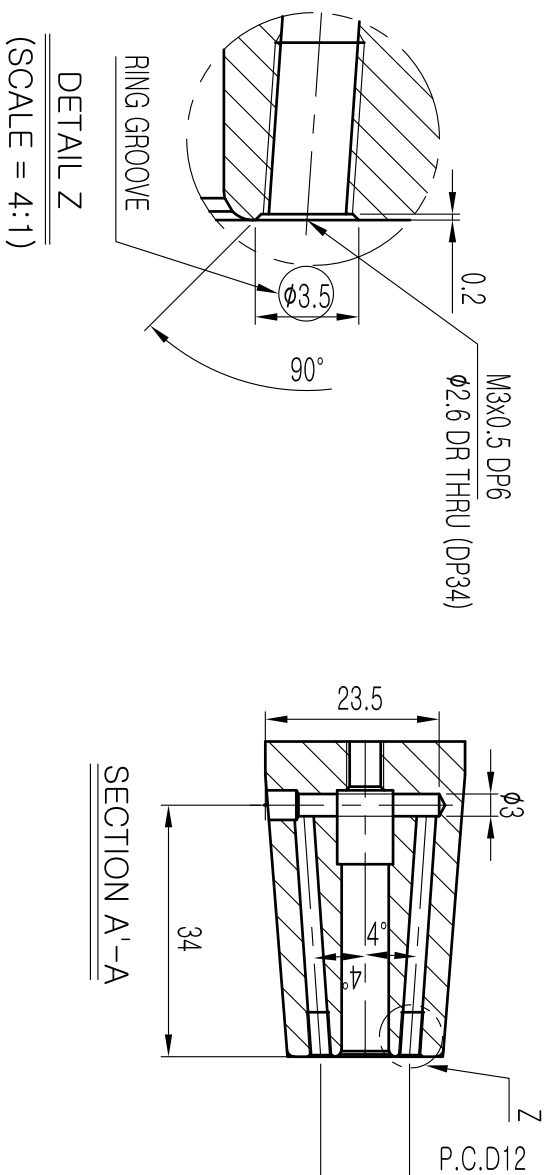

- NOTE**
1. ROUND R=1.0
 2. BREAK SHARP CONNERS 0.5x45°
 3. ANGLES ±0°15'
 4. BALANCE : G2.5 / 25,000rpm

MARKING

SSK HSK63A-SFH1/4CR-5.12
VQ301JR 월/년0일 G2.5/25,000

| | | | | | | | | | | | | | | | | | | |
|-------------|----------------------------------|-----------------|------------|------------|---------|------|------|------|--------------|-------|-------|--------|---------|---------|-------|---------|---------|----------|
| MATERIAL | REV No. | 00 | DATE | 2021.03.18 | 기 호 | Rmax | Ra | Rz | 기 본 공 차 (mm) | 구 분 | 1-50 | 50-100 | 100-250 | 250-500 | DRAWN | CHECKED | CHECKED | APPROVED |
| MAT. SIZE | SURFACE TREATMENT | | | | ~ | - | - | - | 내 경 | +0.1 | +0.15 | +0.25 | +0.35 | Y.H.J | | | | |
| HARDNESS | KIND | H _{RC} | ISO12164-1 | | ▽ | 100S | 25a | 100Z | 외 경 | -0 | -0.15 | -0.25 | -0.35 | | | | | |
| DESCRIPTION | SHRINK FIT HOLDER | | | | ▽ | 25S | 63a | 25Z | 전 장 | +0.1 | ±0.15 | ±0.25 | ±0.35 | | | | | |
| ORDER MAKER | SAB | OEM CODE | VQ301JR | TYPE | 도 조 면 표 | 6.3S | 1.6a | 6.3Z | SCALE | 1 : 1 | | | | | | | | |
| SPEC. | HSK63A-SFH6.35(1/4)CR-130(5.12") | | | Machining | 도 조 면 표 | 0.8S | 0.2a | 0.8Z | Dim. | mm | | | | | | | | |