


NO.	DATE	REVISION	DRAWN



APPROVAL

DATE

SIGNATURE

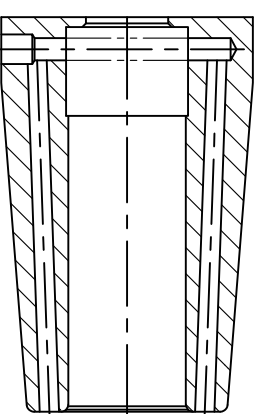

- NOTE
- 1.ROUND R=1.0
 - 2.BREAK SHARP CORNERS 0.5x45°
 - 3.ANGLES ±0°15'
 - 4.SFH-C ADJUST BOLT(T) : M12x1.0x15L
 - 5.NYLOC BOLT : M4x0.7x4L(4EA)
 - 6.BALANCE : G2.5 / 25,000rpm

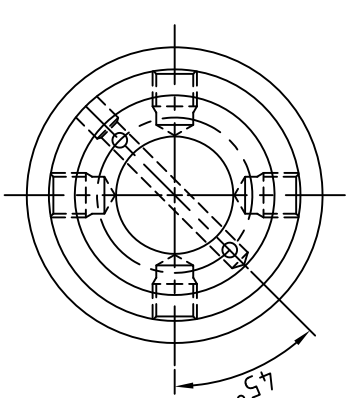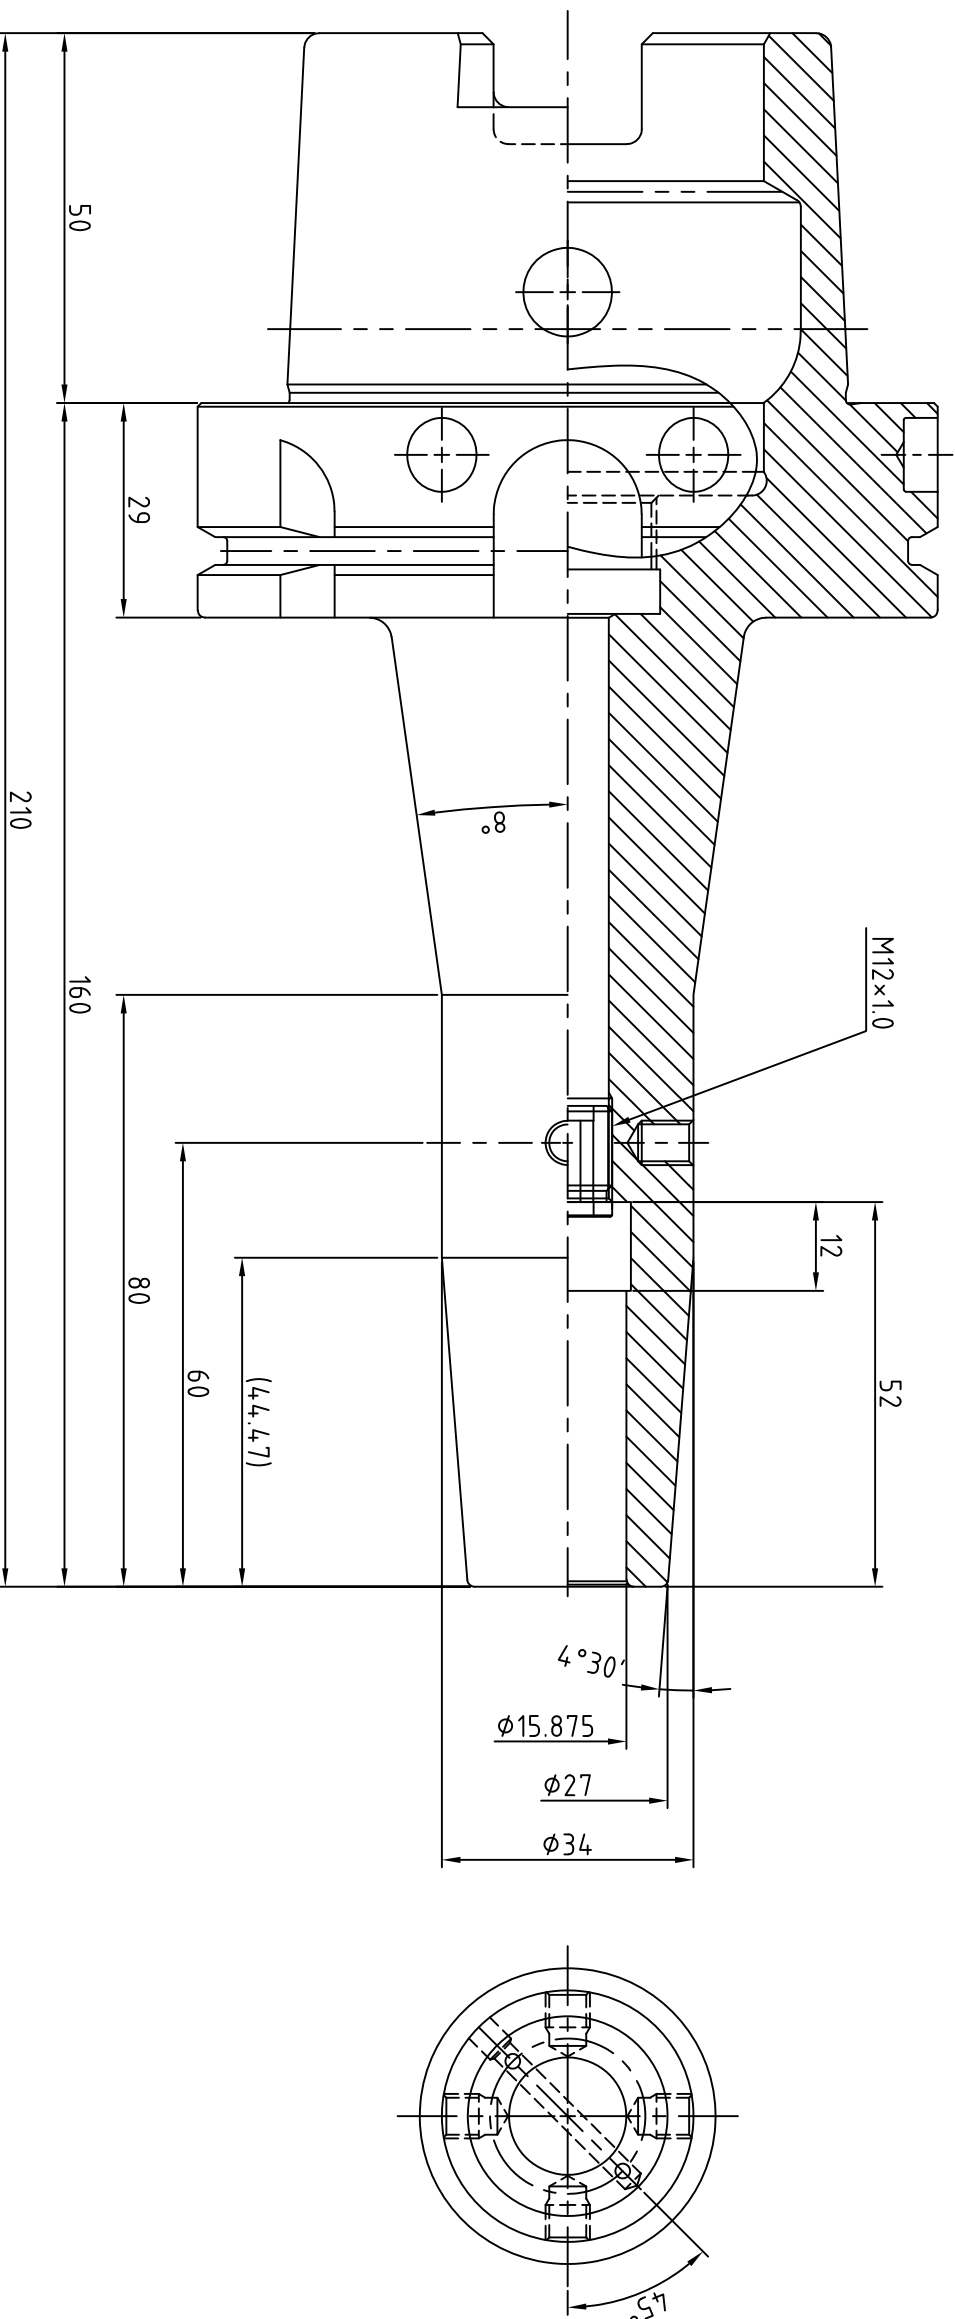

MARKING	
	HSK100A-SFH5/8CTW-6.30
	VR034JTW 월/년0일 G2.5/25,000

MATERIAL	REV No.	00	DATE	2021.03.22
MAT. SIZE	SURFACE TREATMENT			
HARDNESS	H _R C	KIND	ASME B5.50 : 2009	
DESCRIPTION	SHRINK FIT HOLDER			
ORDER MAKER	SAB	OEM CODE	VR034JTW	
SPEC.	HSK100A-SFH15.875(5/8")CTW-160(6.30")			

표면	기호	Rmax	Ra	Rz
~	√	-	-	-
▽	√ ^W	100S	25a	100Z
▽▽	√ ^x	25S	63a	25Z
▽▽▽	√ ^y	6.3S	1.6a	6.3Z
▽▽▽▽	√ ^z	0.8S	0.2a	0.8Z

기	본	차	구	분	1-50	50-100	100-250	250-500
내	경		±0.1	-0	+0.15	-0	+0.25	+0.35
외	경		-0.1	+0	-0.15	+0	-0.25	-0.35
전	장		±0.1	±0.15	±0.25	±0.25	±0.35	

SCALE	1 : 1
Dim.	mm

DRAWN	CHECKED	CHECKED	CHECKED	APPROVED
Y.H.J				

SSK
 신세기산업주식회사