
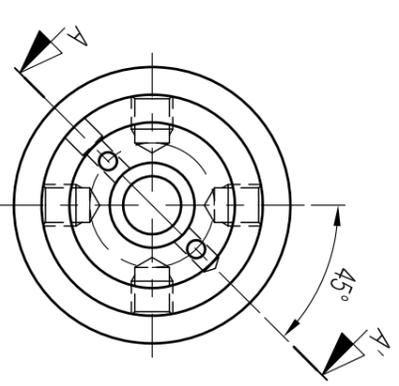
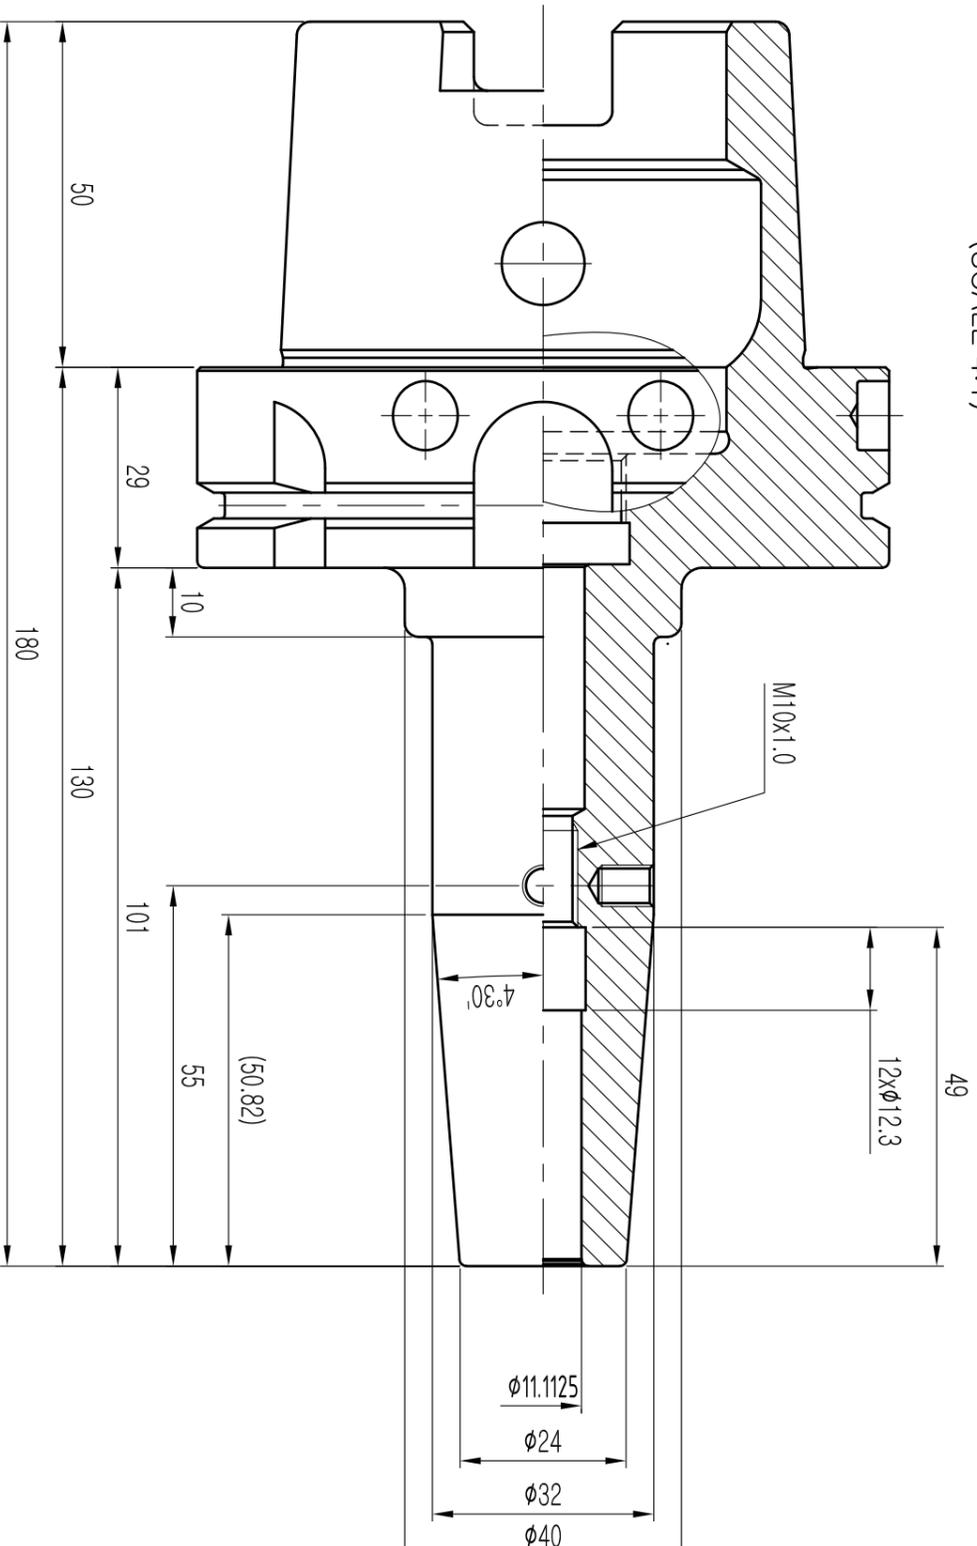


APPROVAL	
DATE	
SIGNATURE	

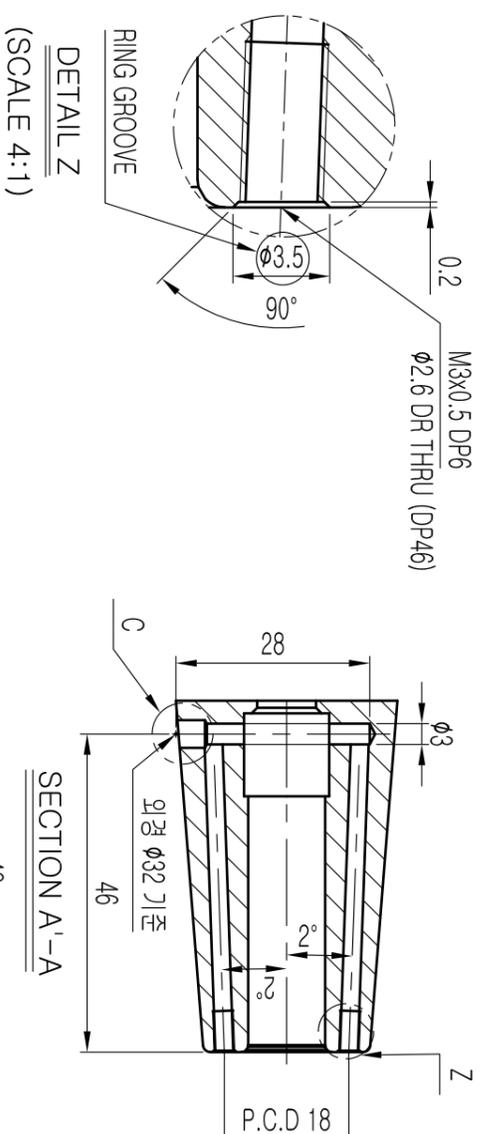

- NOTE**
1. ROUND R=1.0
 2. BREAK SHARP CONERS 0.5x45°
 3. ANGLES ±0°15'
 4. BALANCE : G2.5 / 25,000rpm

MARKING

HSK100A-SFH7/16CR-5.12
 VR304JR 월/년0일 G2.5/25,000

MATERIAL	REV No.	00	DATE	2021.03.18	기 호	Rmax	Ra	Rz	기 본 차 (mm)	구 분	1-50	50-100	100-250	250-500	DRAWN	CHECKED	CHECKED	APPROVED
MAT. SIZE	SURFACE TREATMENT				~	-	-	-	내 경	+0.1	+0.15	+0.25	+0.35	Y.H.J				
HARDNESS	KIND	H _{RC}	ISO12164-1		▽	▽	▽	▽	외 경	+0	-0.15	-0.25	-0.35					
DESCRIPTION	SHRINK FIT HOLDER				▽	▽	▽	▽	전 장	±0.1	±0.15	±0.25	±0.35					
ORDER MAKER	SAB	OEM CODE	VR304JR	TYPE	도 조 면 표	0.85	1.6a	6.3Z	SCALE	1 : 1								
SPEC.	HSK100A-SFH11.1125(7/16"CR-130(5.12"))				도 조 면 표	0.2a	0.8Z		Dim.	mm								