
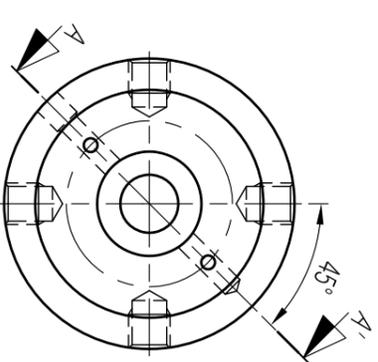
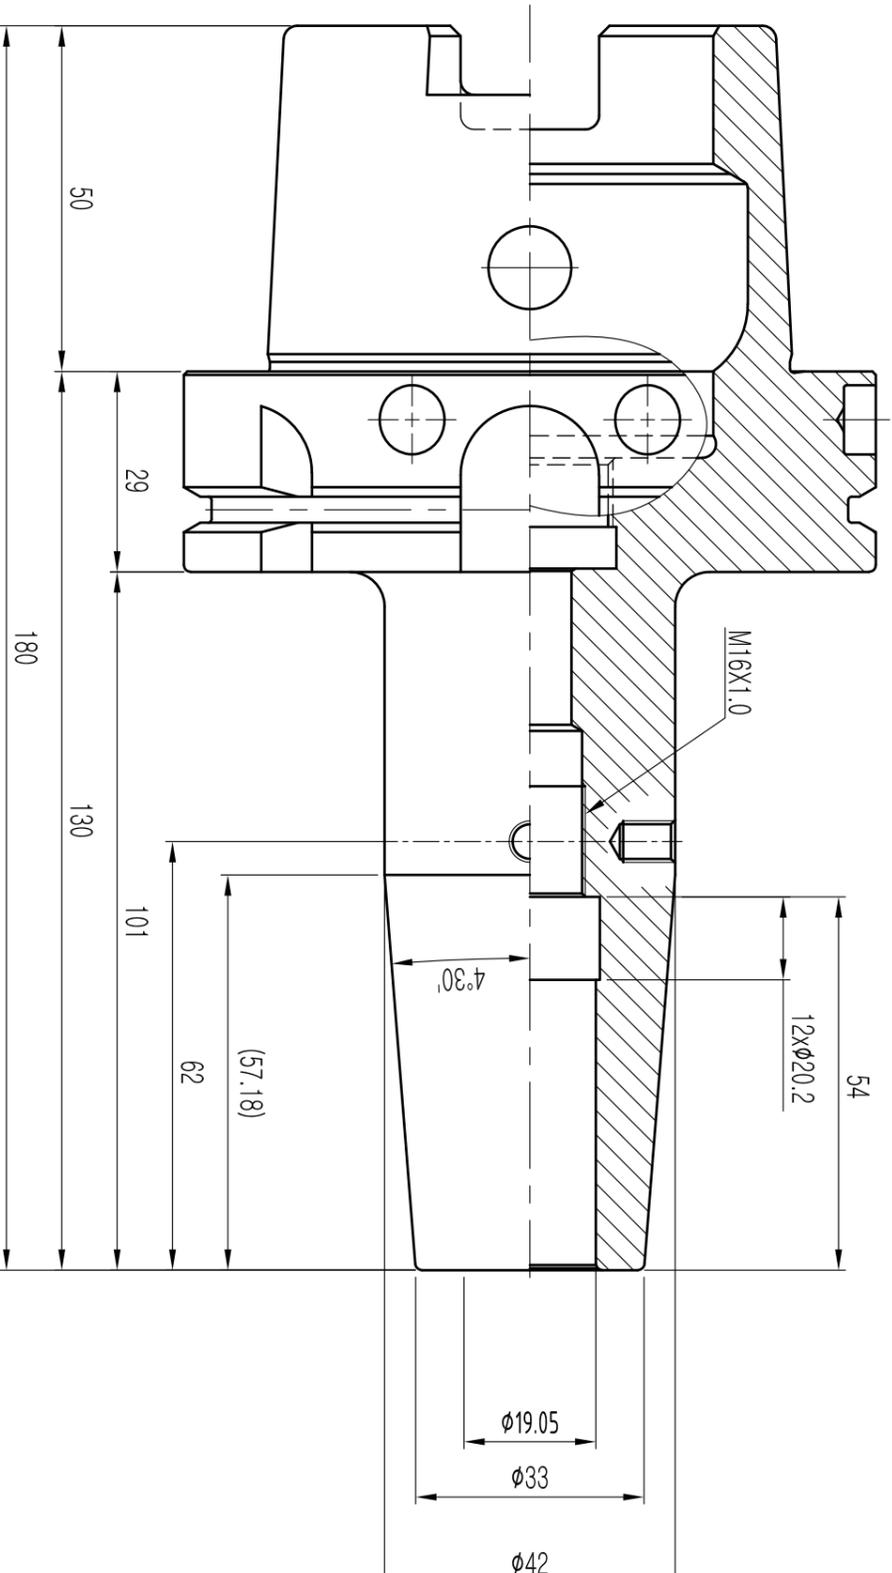


APPROVAL	
DATE	
SIGNATURE	

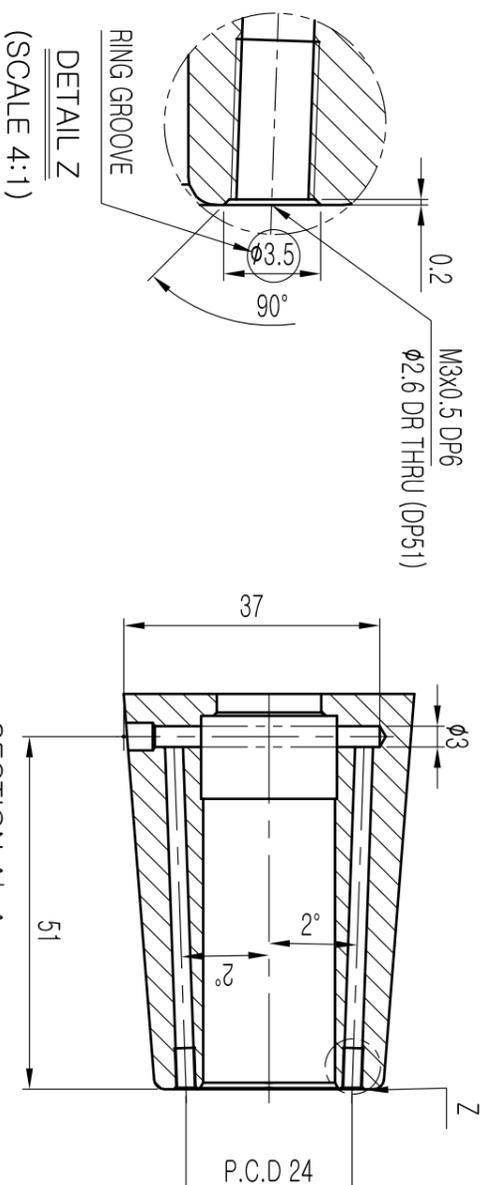

- NOTE**
1. ROUND R=1.0
 2. BREAK SHARP CONERS 0.5x45°
 3. ANGLES ±0°15'
 4. BALANCE : G2.5 / 25,000rpm

MARKING

SSK HSK100A-SFH3/4CR-5.12
VR307JR 월/년0일 G2.5/25,000

MATERIAL	REV No.	00	DATE	2021.03.18	표	기	호	Rmax	Ra	Rz	기	본	차	구	분	1-50	50-100	100-250	250-500	DRAWN	CHECKED	CHECKED	CHECKED	APPROVED
MAT. SIZE	SURFACE TREATMENT				면	~	▽	-	-	-	부	내	경	내	경	+0.1	+0.15	+0.25	+0.35	Y.H.J				
HARDNESS	H _{RC}	KIND	ISO12164-1		조	▽	▽	100S	25a	100Z	차	외	경	외	경	+0	+0.15	+0	+0.35					
DESCRIPTION	SHRINK FIT HOLDER				도	▽	▽	25S	63a	25Z	전	장	전	장	전	±0.1	±0.15	±0.25	±0.35					
ORDER MAKER	SAB	OEM CODE	VR307JR			▽	▽	63S	1.6a	63Z	SCALE					1 : 1								
SPEC.	HSK100A-SFH19.05(3/4)CR-130(5.12")	TYPE	Machining			▽	▽	0.8S	0.2a	0.8Z	Dim.					mm								