
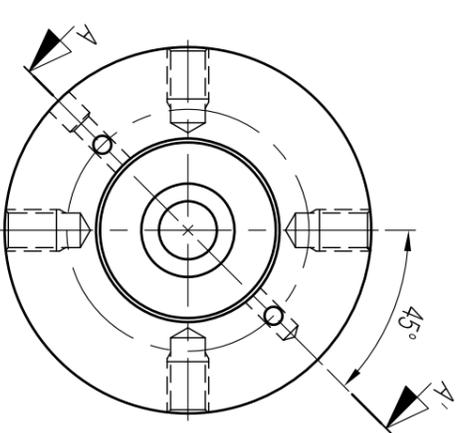
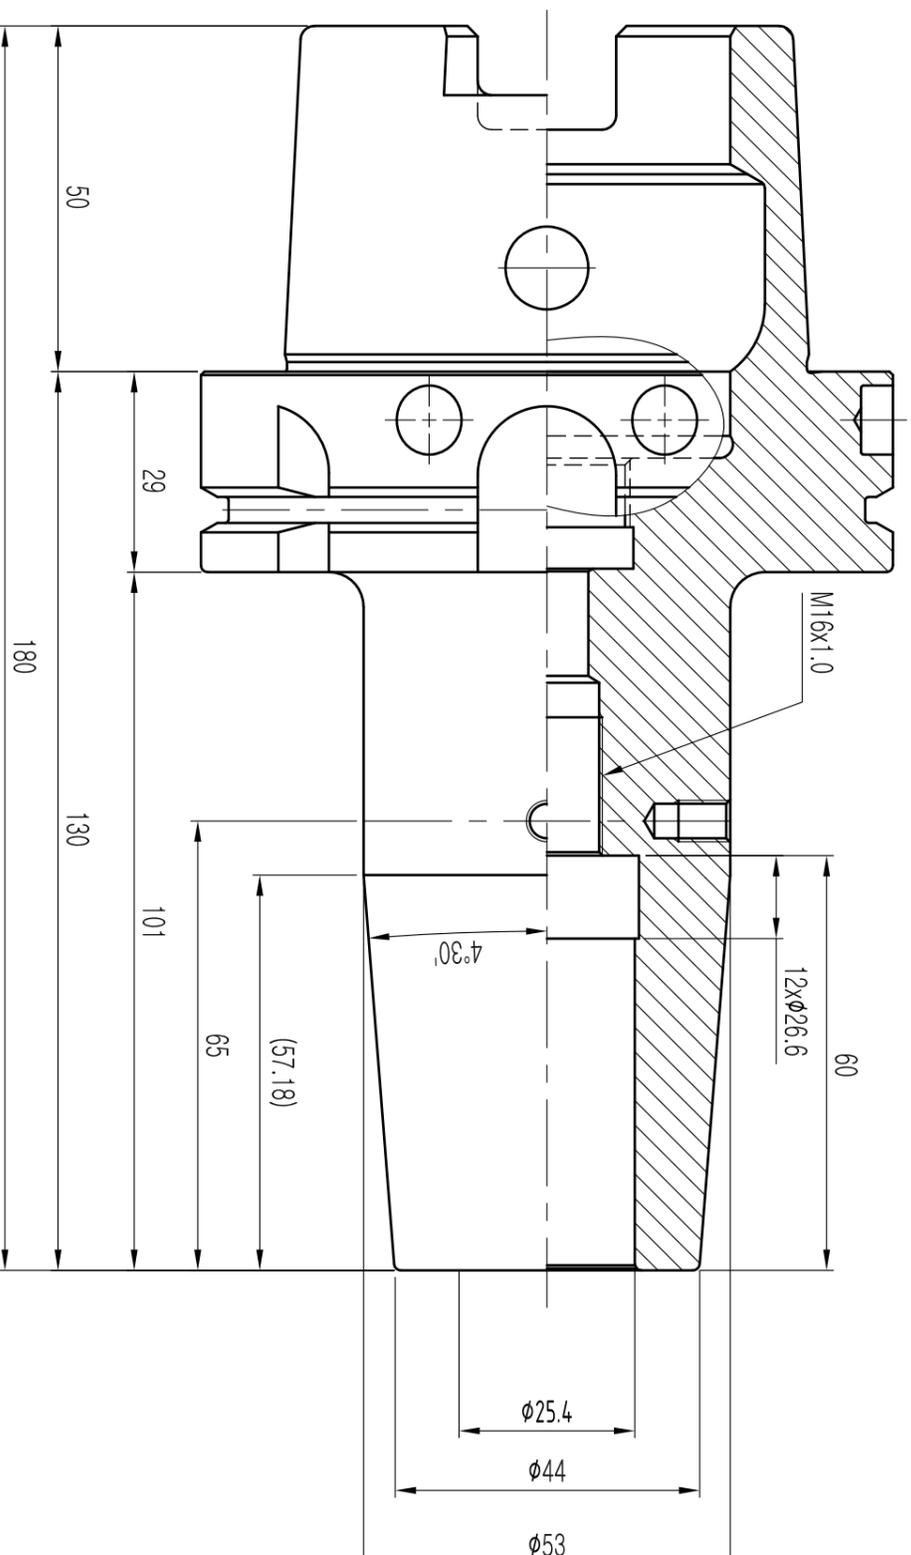
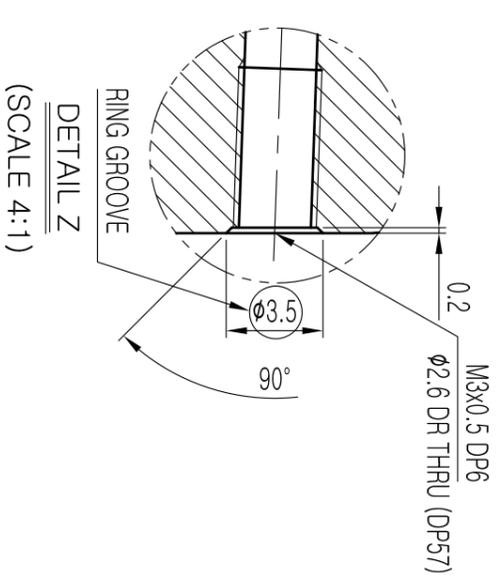


NO.	DATE	REVISION	DRAWN

APPROVAL	
DATE	
SIGNATURE	

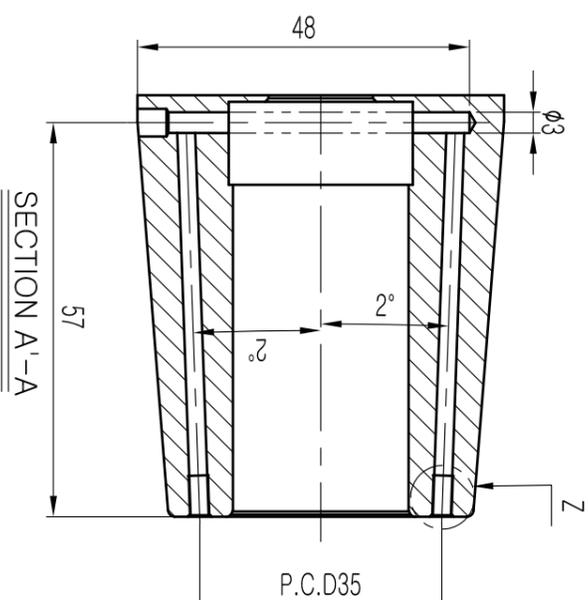

- NOTE**
1. ROUND R=1.0
 2. BREAK SHARP CONERS 0.5X45°
 3. ANGLES ±0°15'
 4. BALANCE : G2.5 / 25,000rpm

MARKING

HSK100A-SFH1CR-5.12
 VR308JR 월/년0일 G2.5/25,000

MATERIAL	REV No.	00	DATE	2021.03.18	기 호	Rmax	Ra	Rz	기 본 공 차 (mm)	구 분	1-50	50-100	100-250	250-500	DRAWN	CHECKED	CHECKED	APPROVED
MAT. SIZE	SURFACE TREATMENT				~	-	-	-	내경	+0.1	+0.15	+0.25	+0.35	Y.H.J				
HARDNESS	KIND	ISO12164-1			▽	100S	25a	100Z	외경	+0	-0.15	-0.25	-0.35					
DESCRIPTION	SHRINK FIT HOLDER				▽	25S	63a	25Z	전장	±0.1	±0.15	±0.25	±0.35					
ORDER MAKER	SAB		OEM CODE	VR308JR	도 조 면 표	6.3S	1.6a	6.3Z	SCALE	1 : 1								
SPEC.	HSK100A-SFH25.4(1)CR-130(5.12")		TYPE	Machining	▽▽▽	0.8S	0.2a	0.8Z	Dim.	mm								

SSK
신세기산업주식회사